

FIG. 2

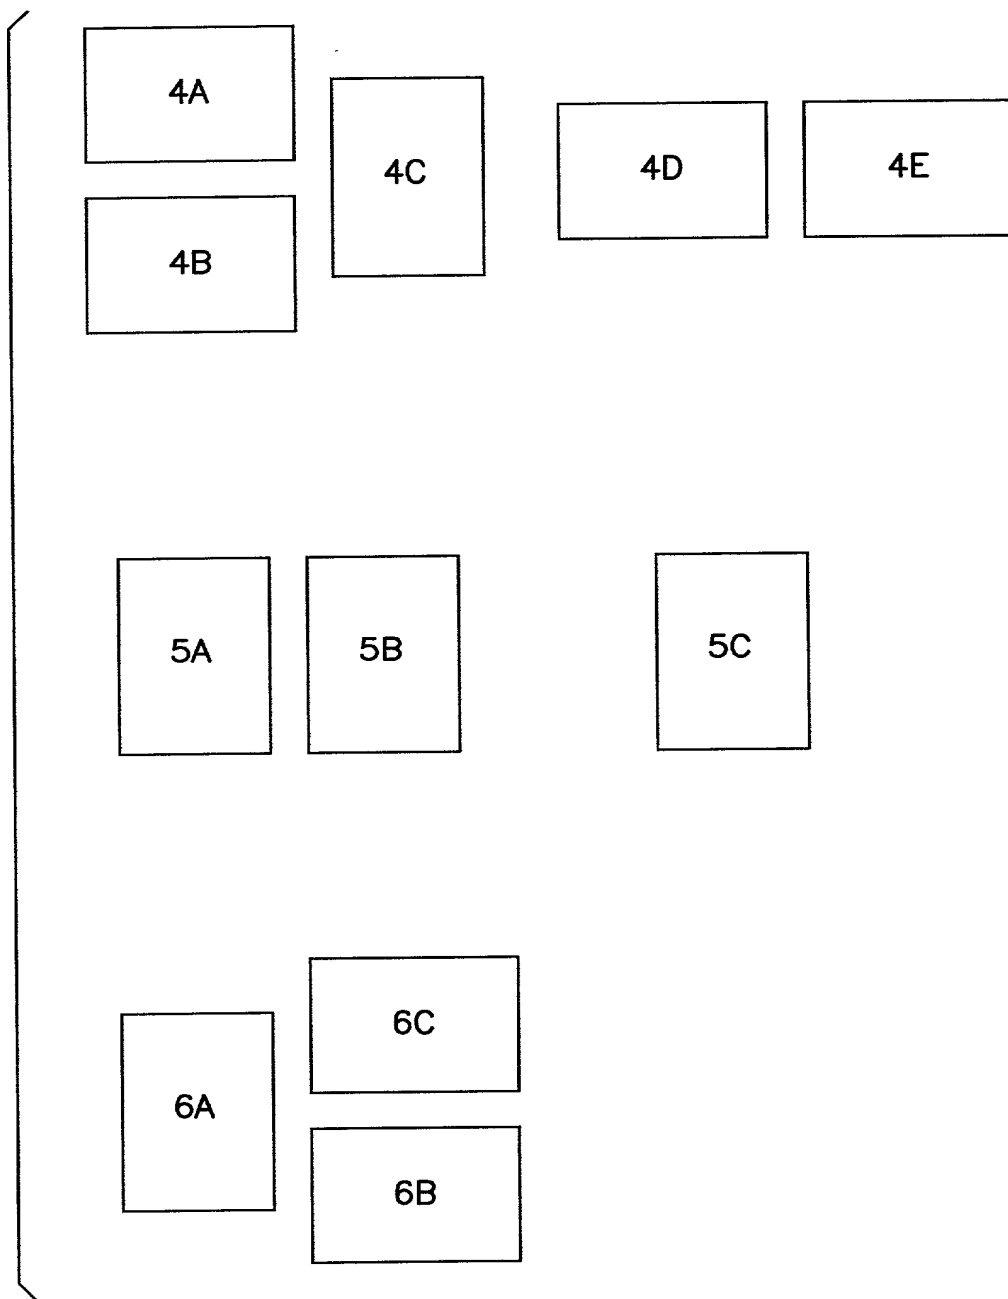


FIG. 3

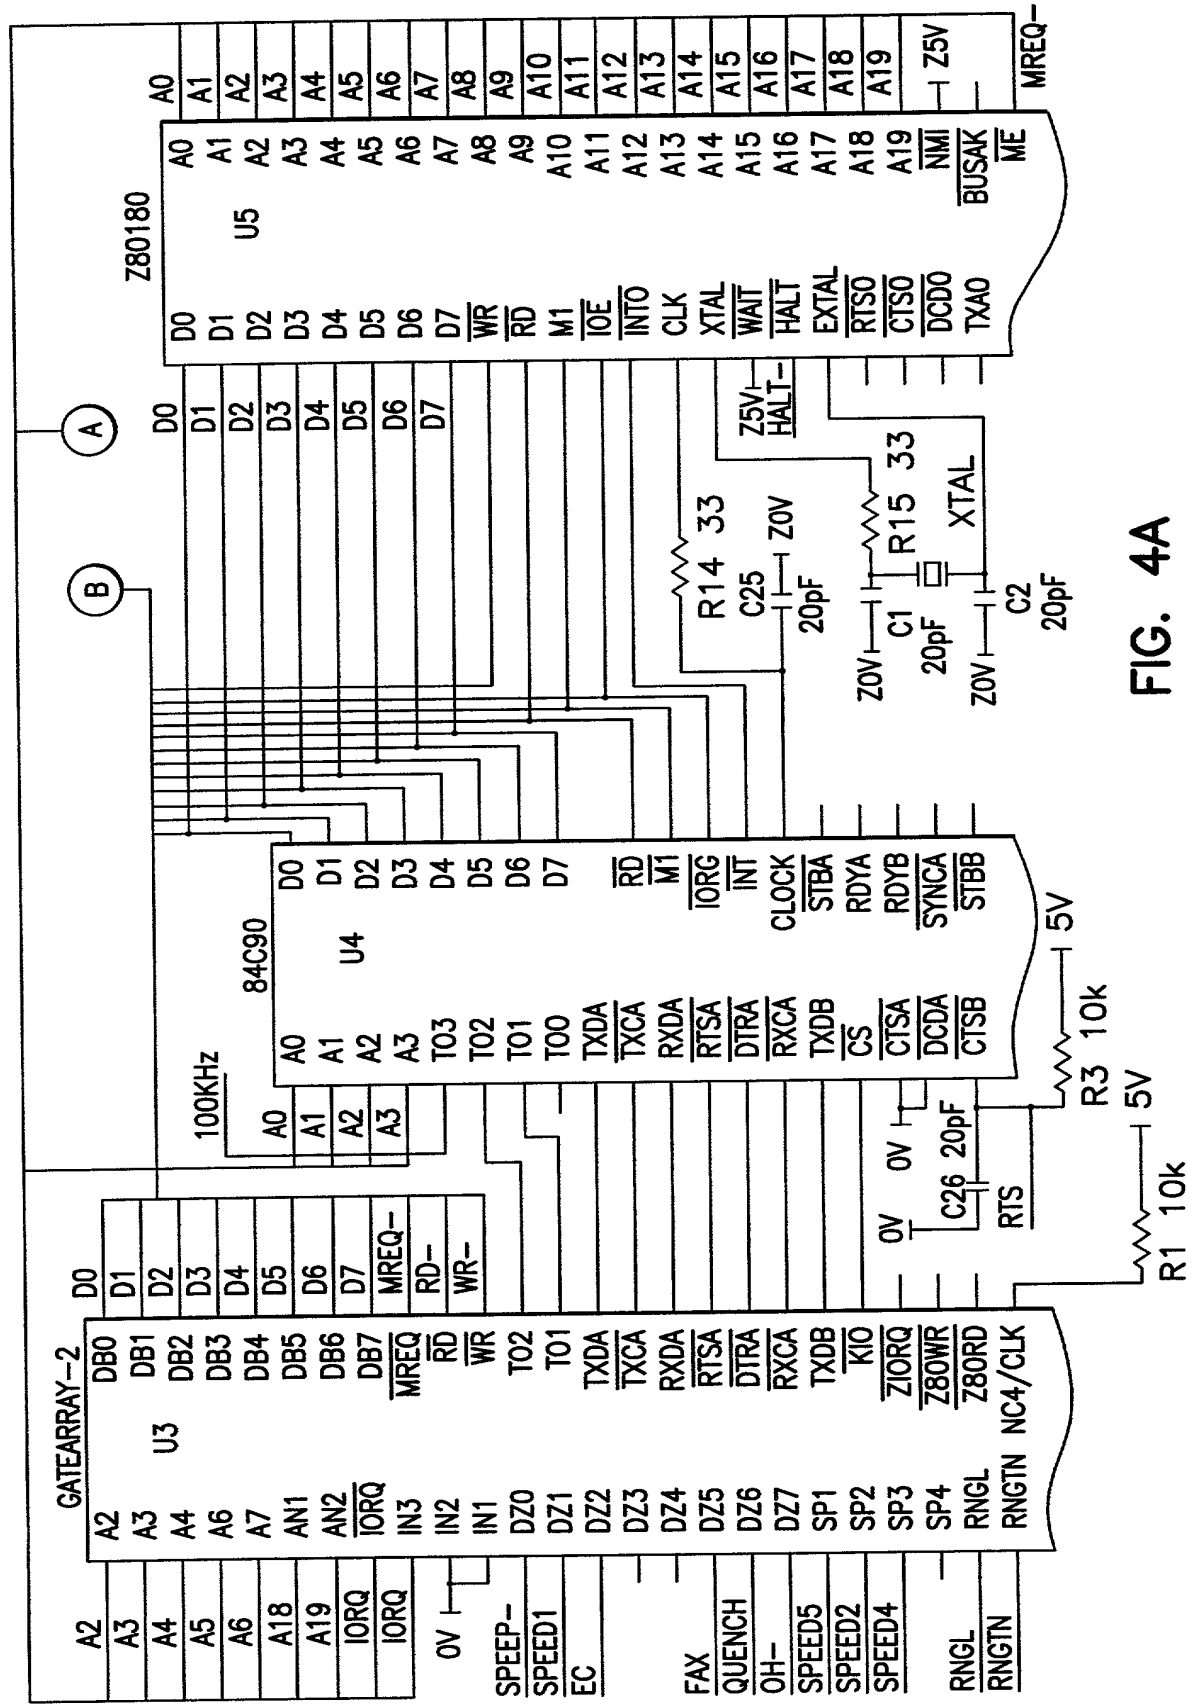


FIG. 4B

100101 62552660

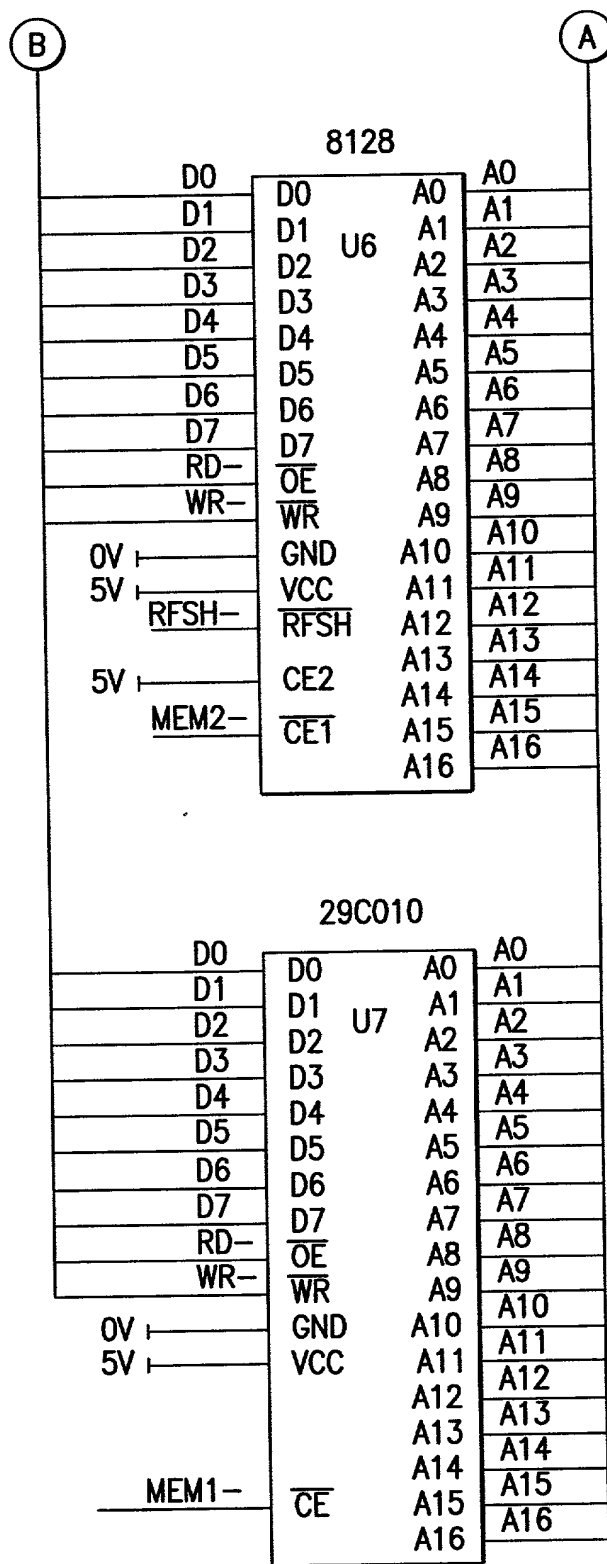


FIG. 4C

FIG. 4D


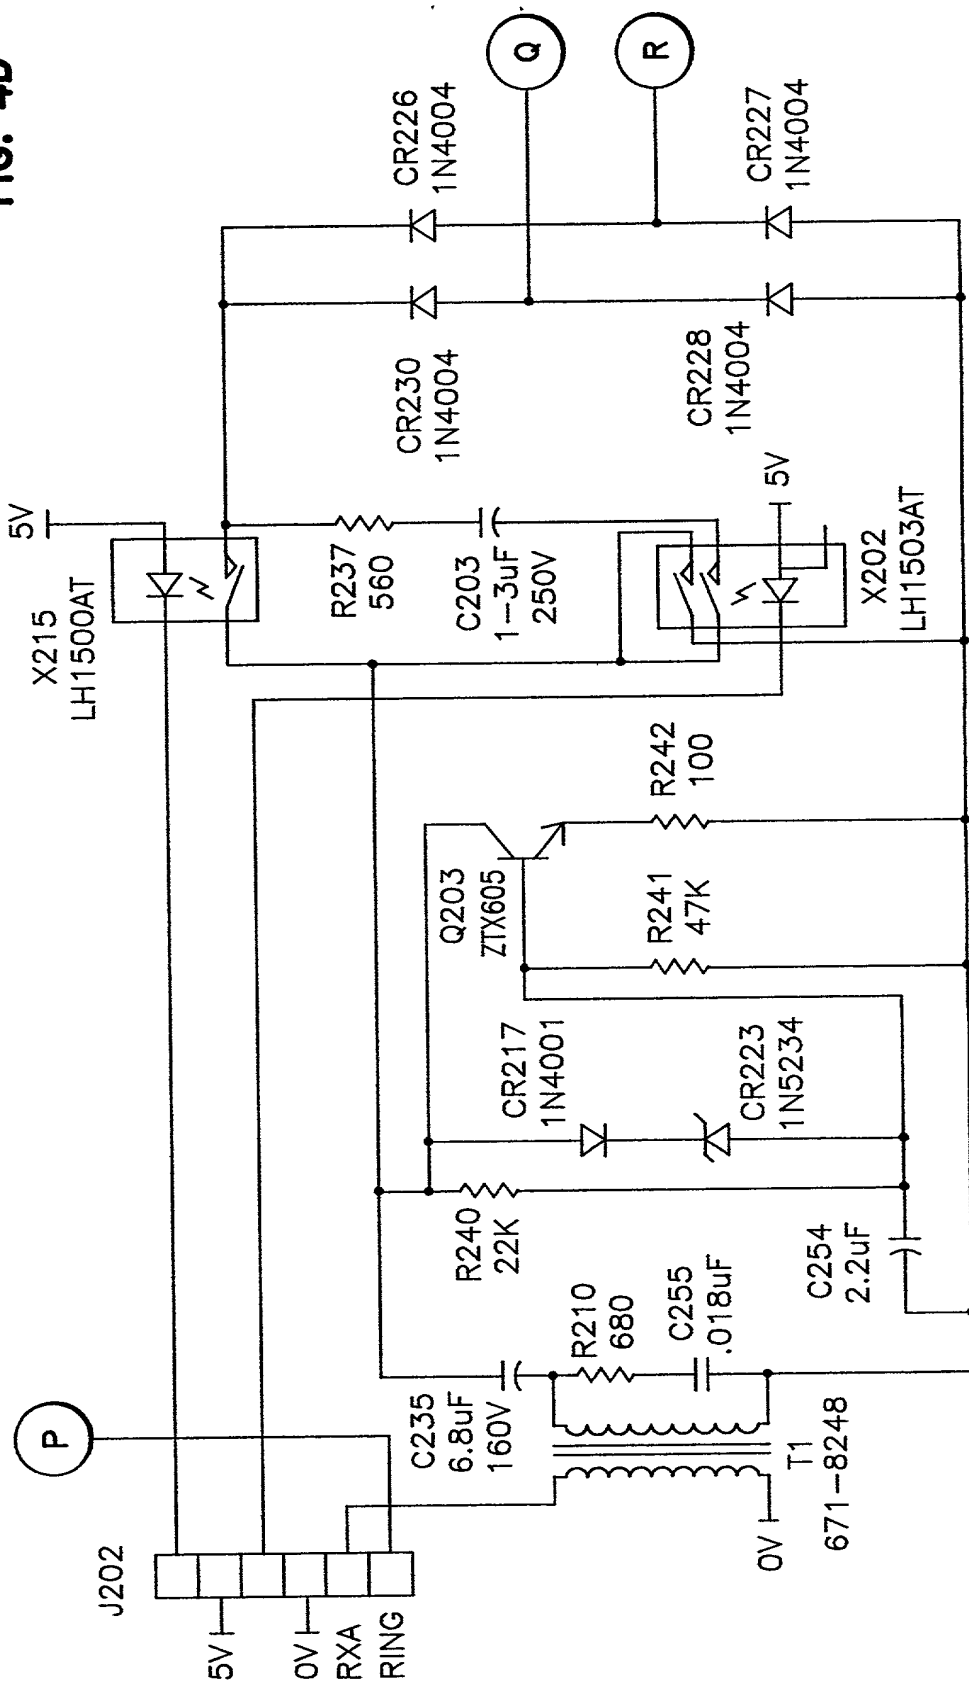


FIG. 4E

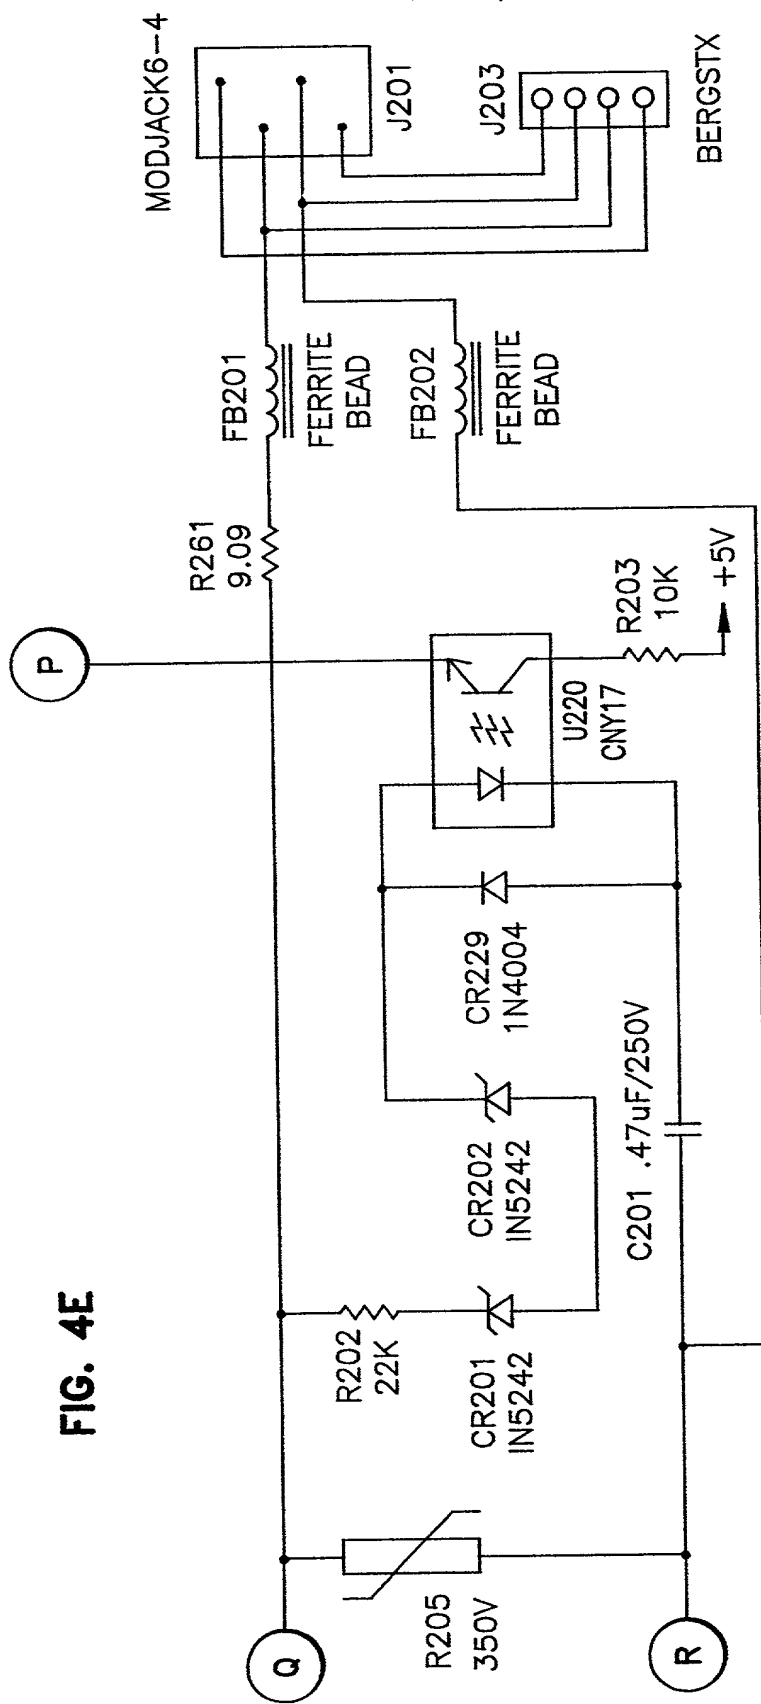

100101 6252660

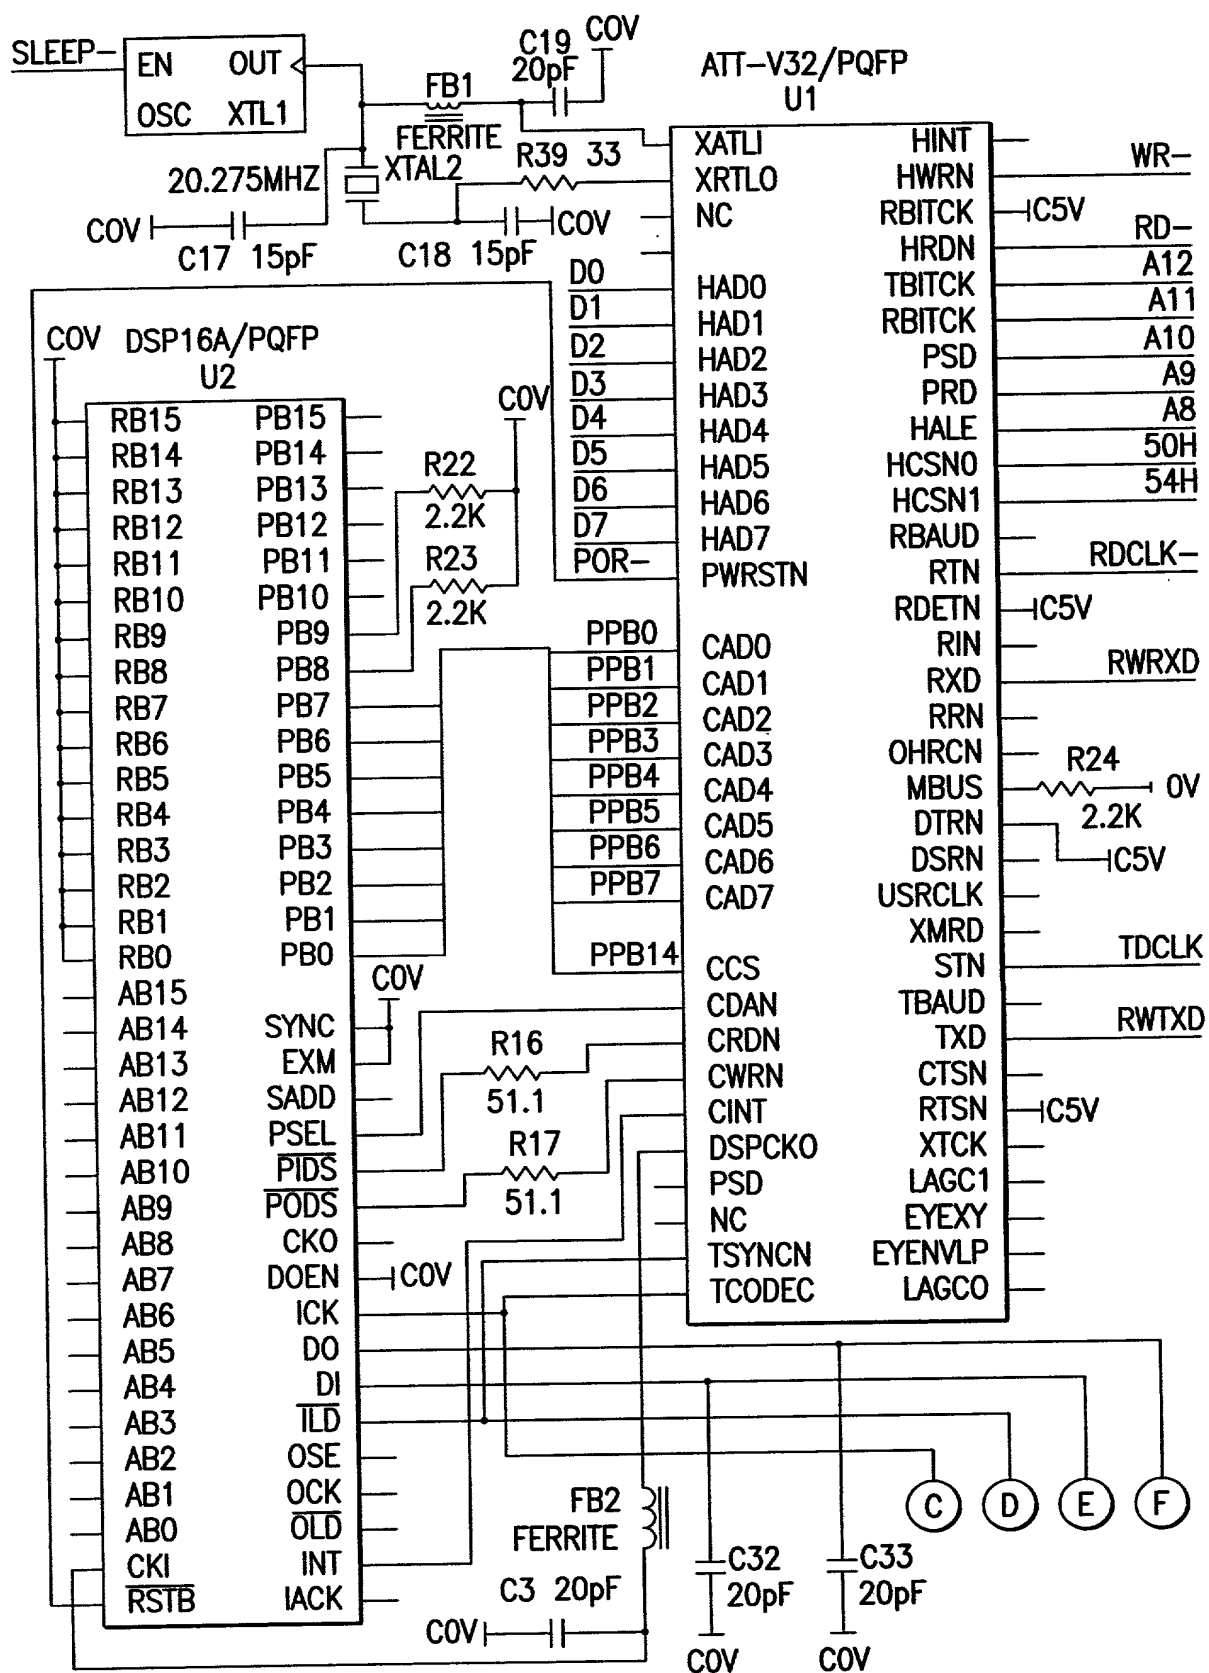


FIG. 5A

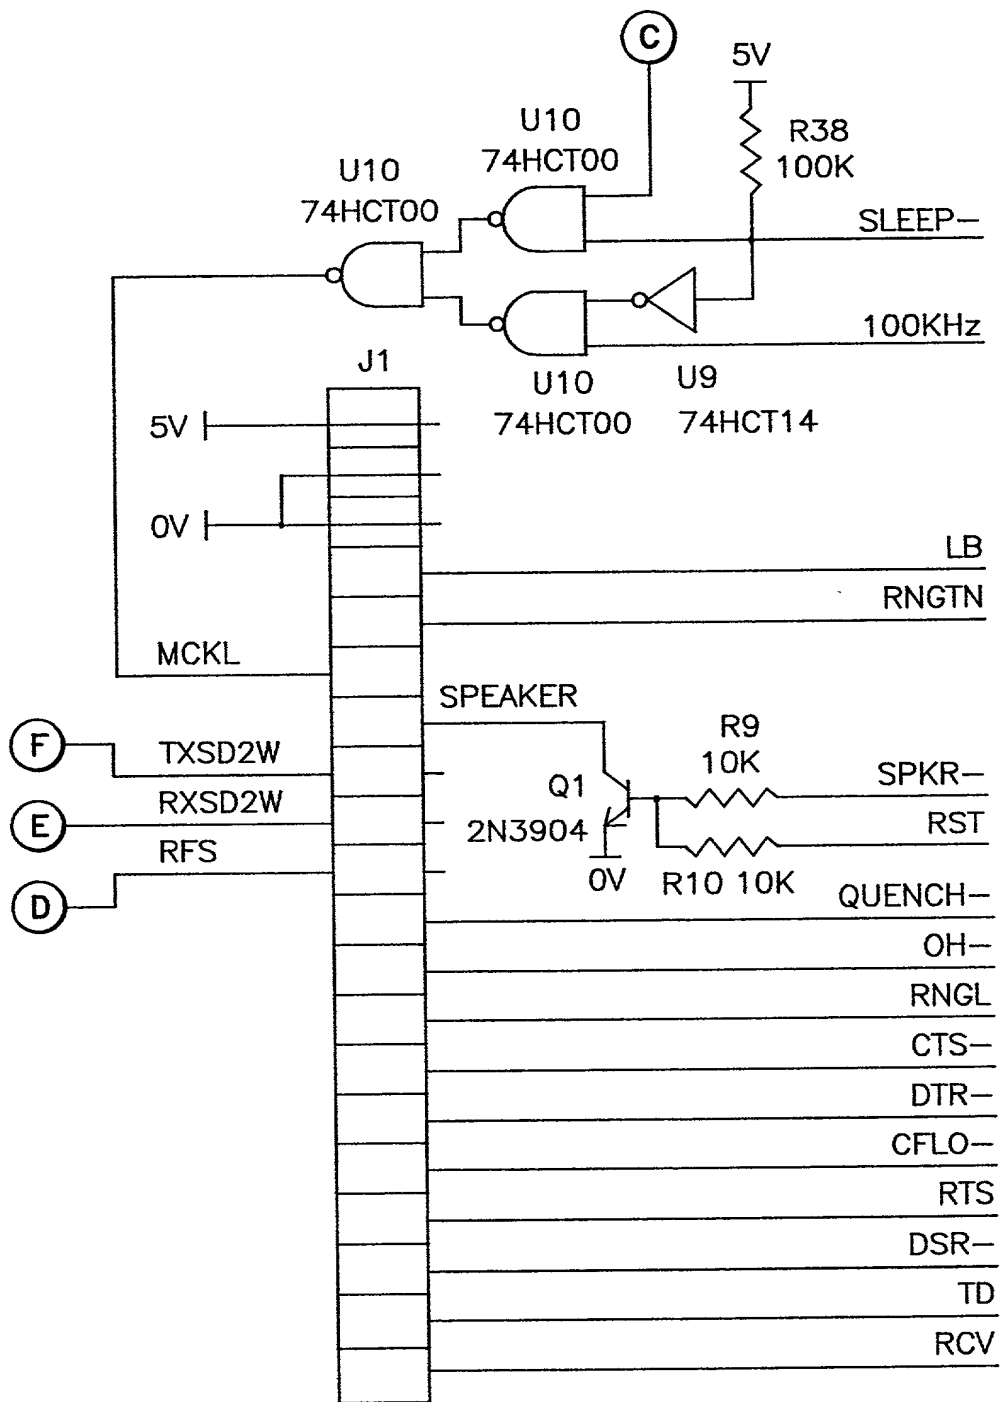


FIG. 5B

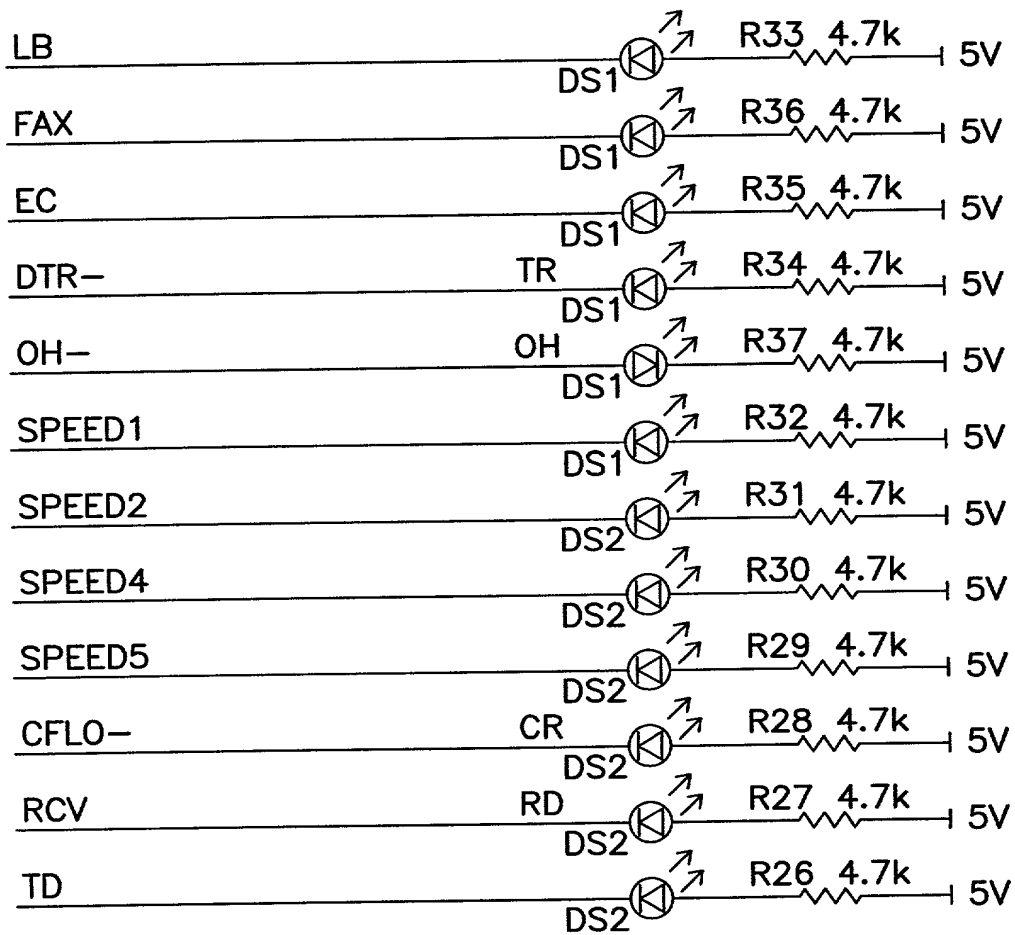


FIG. 5C

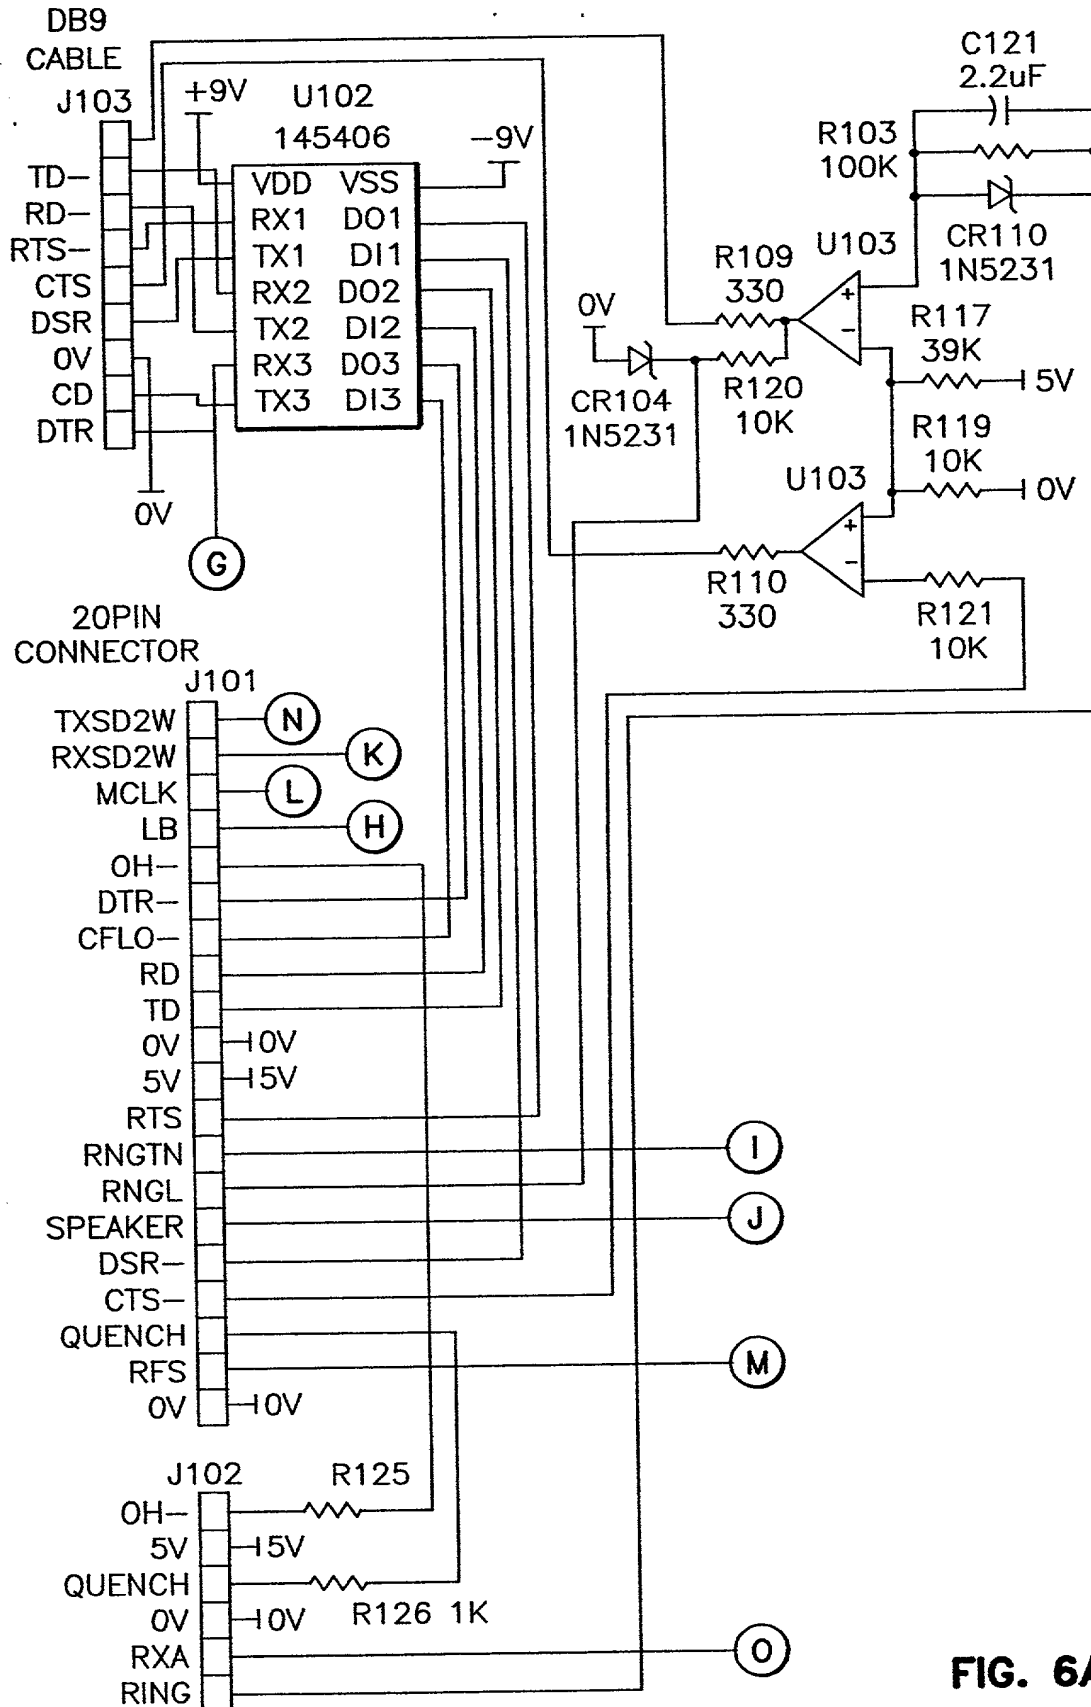
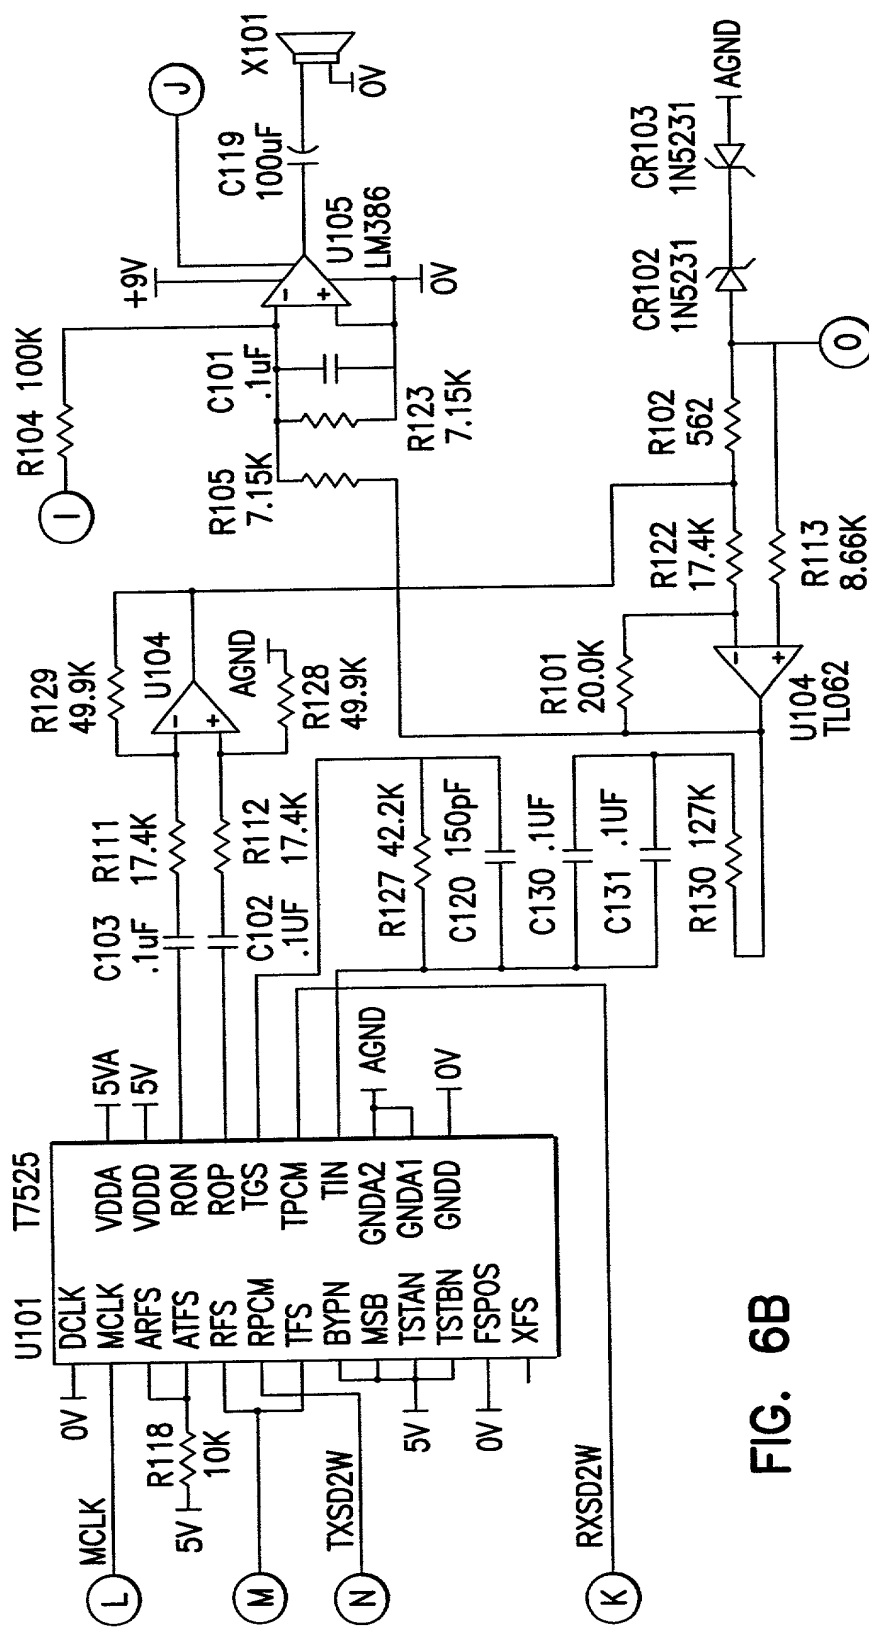


FIG. 6A



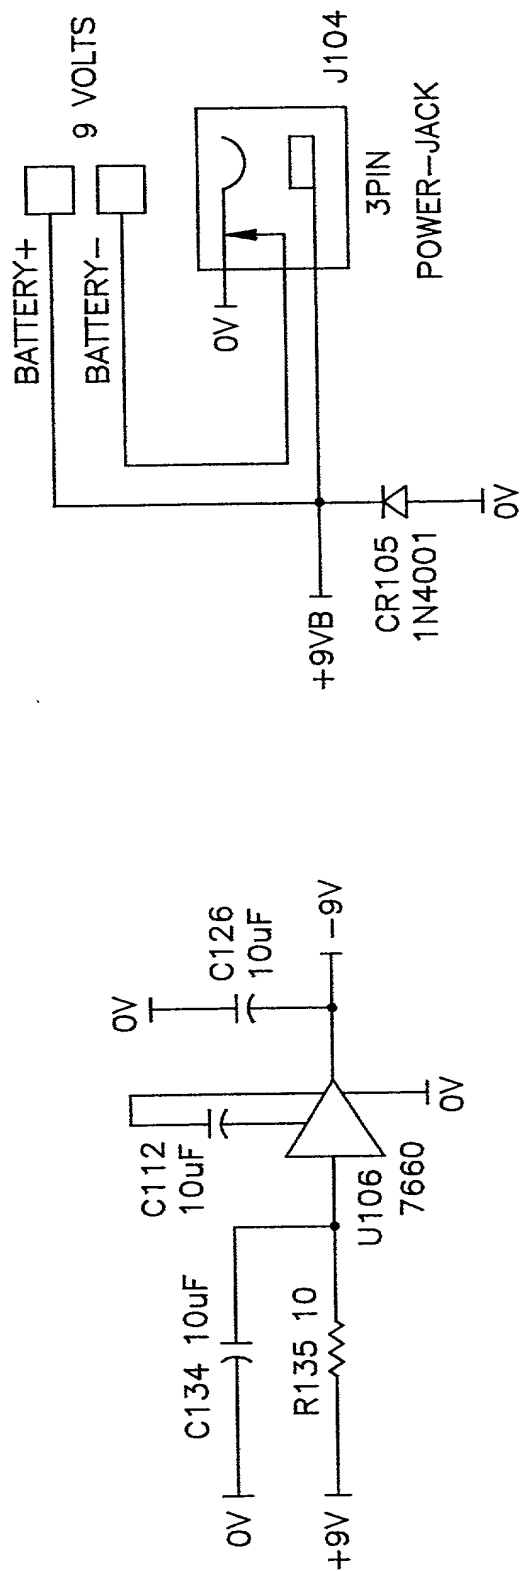
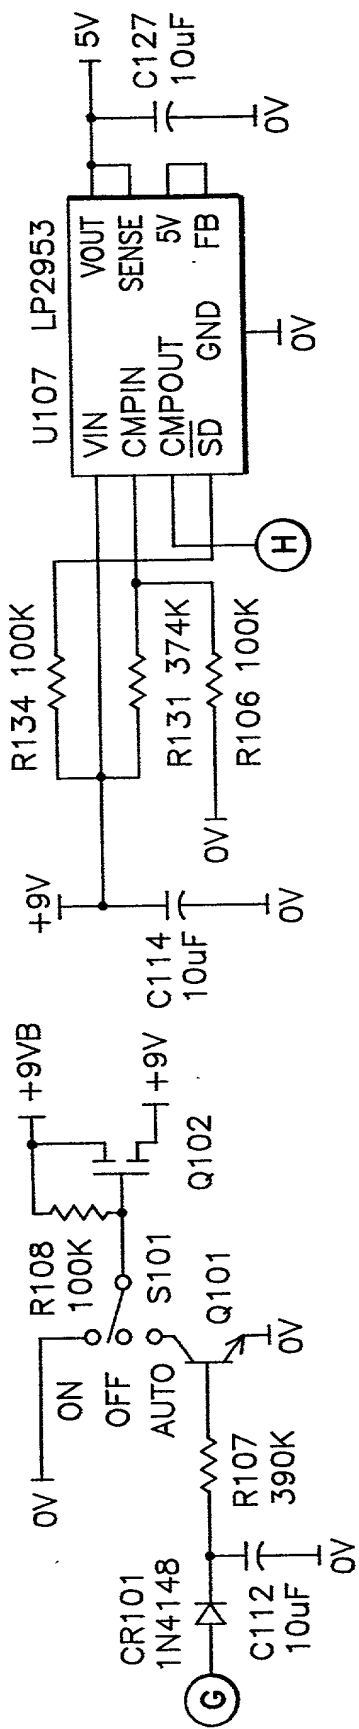


FIG. 6C

THE UNIVERSITY OF CHICAGO

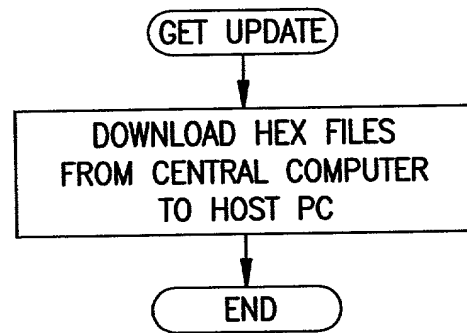
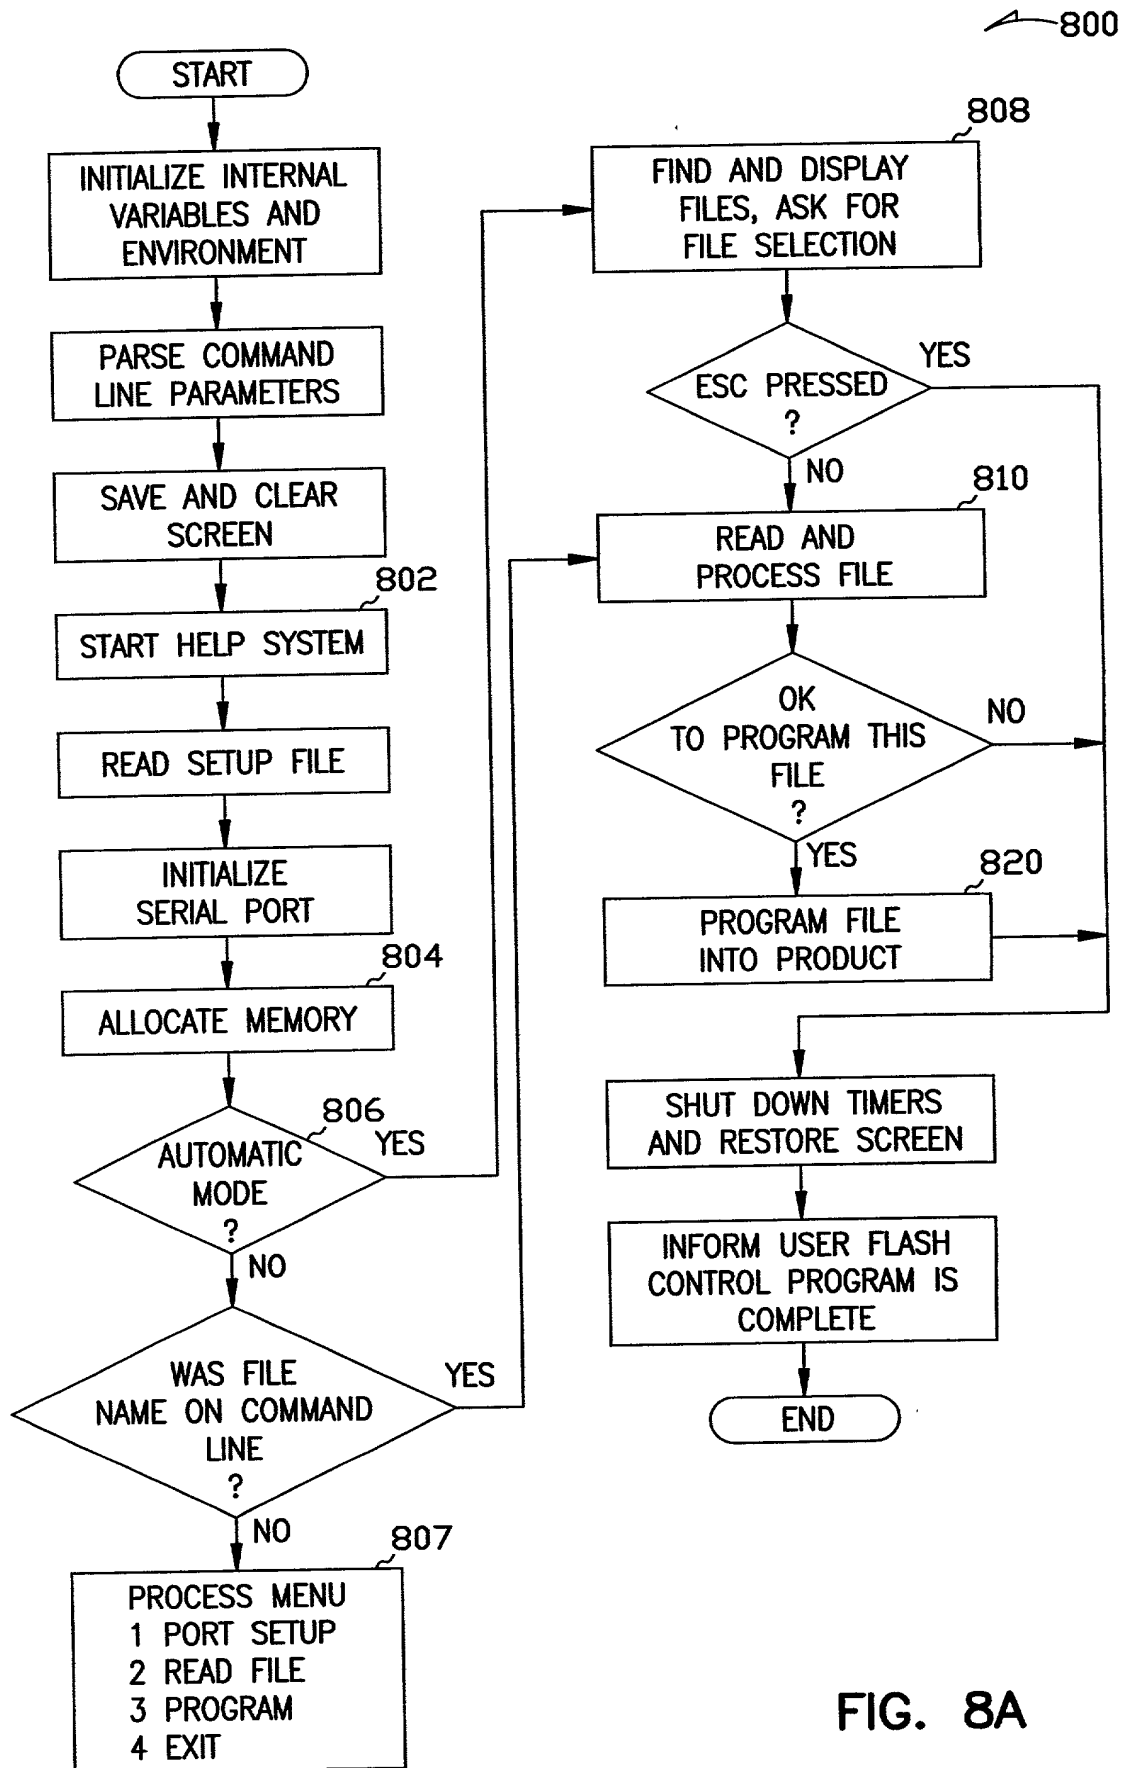


FIG. 7



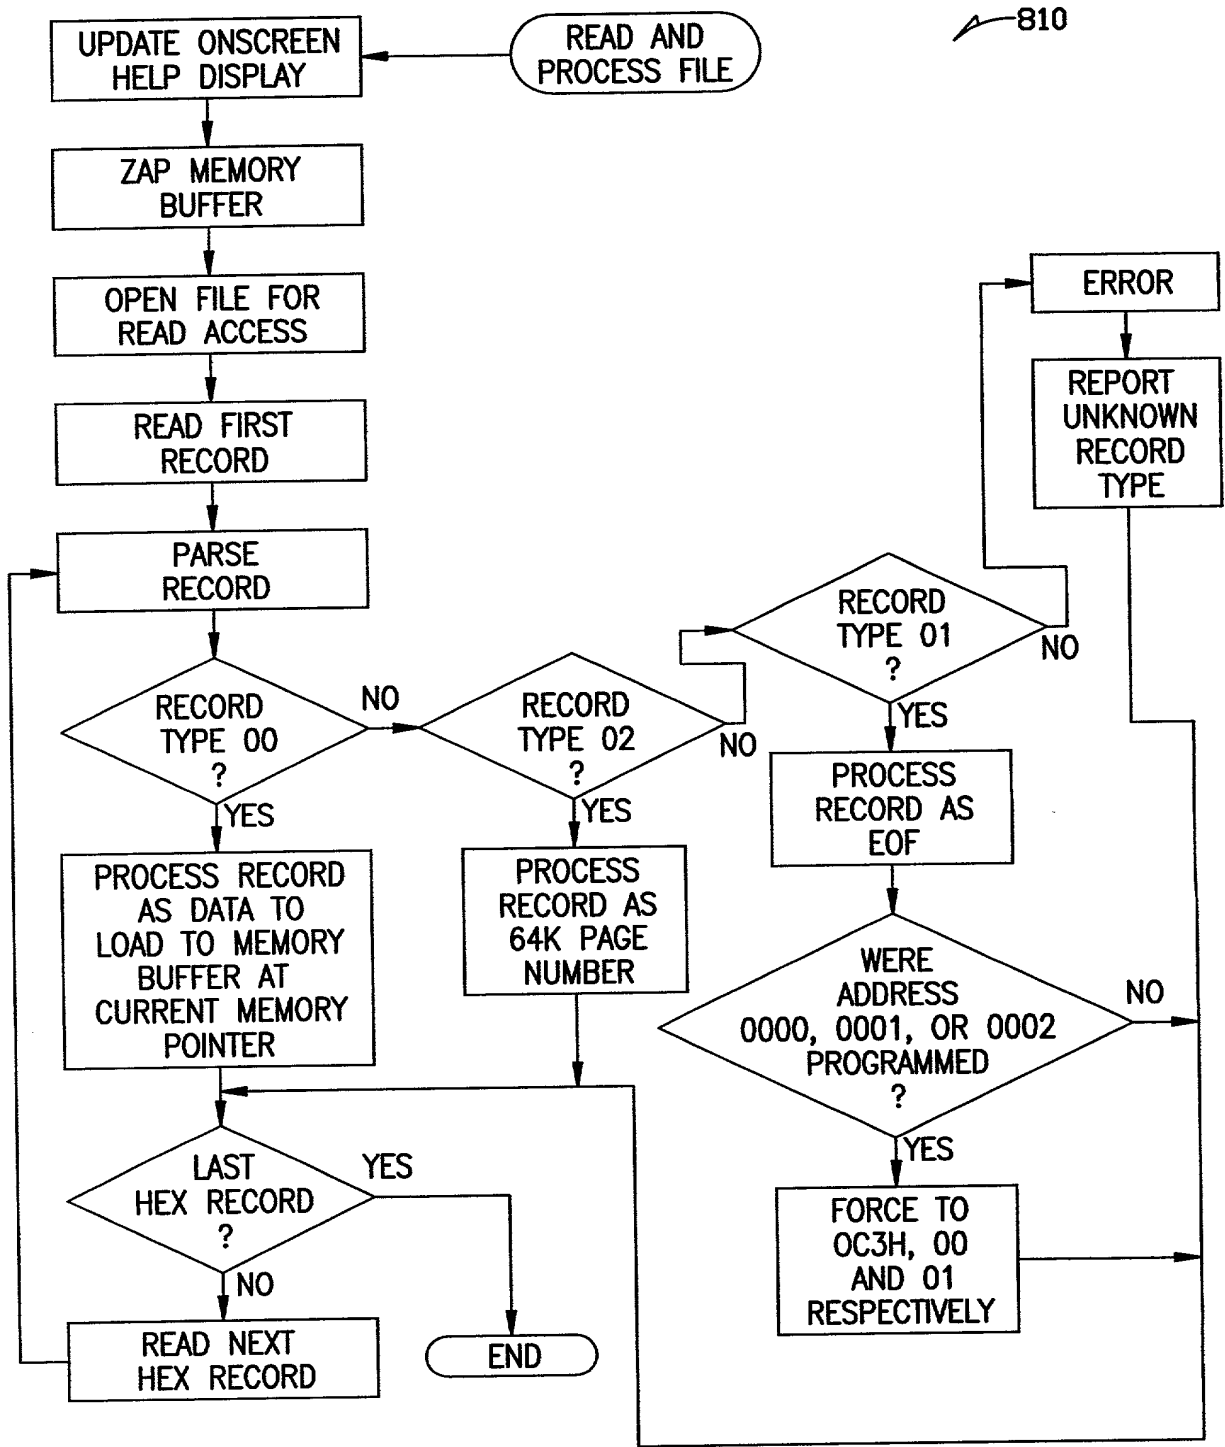


FIG. 8B

PROGRAM FILE INTO PRODUCT

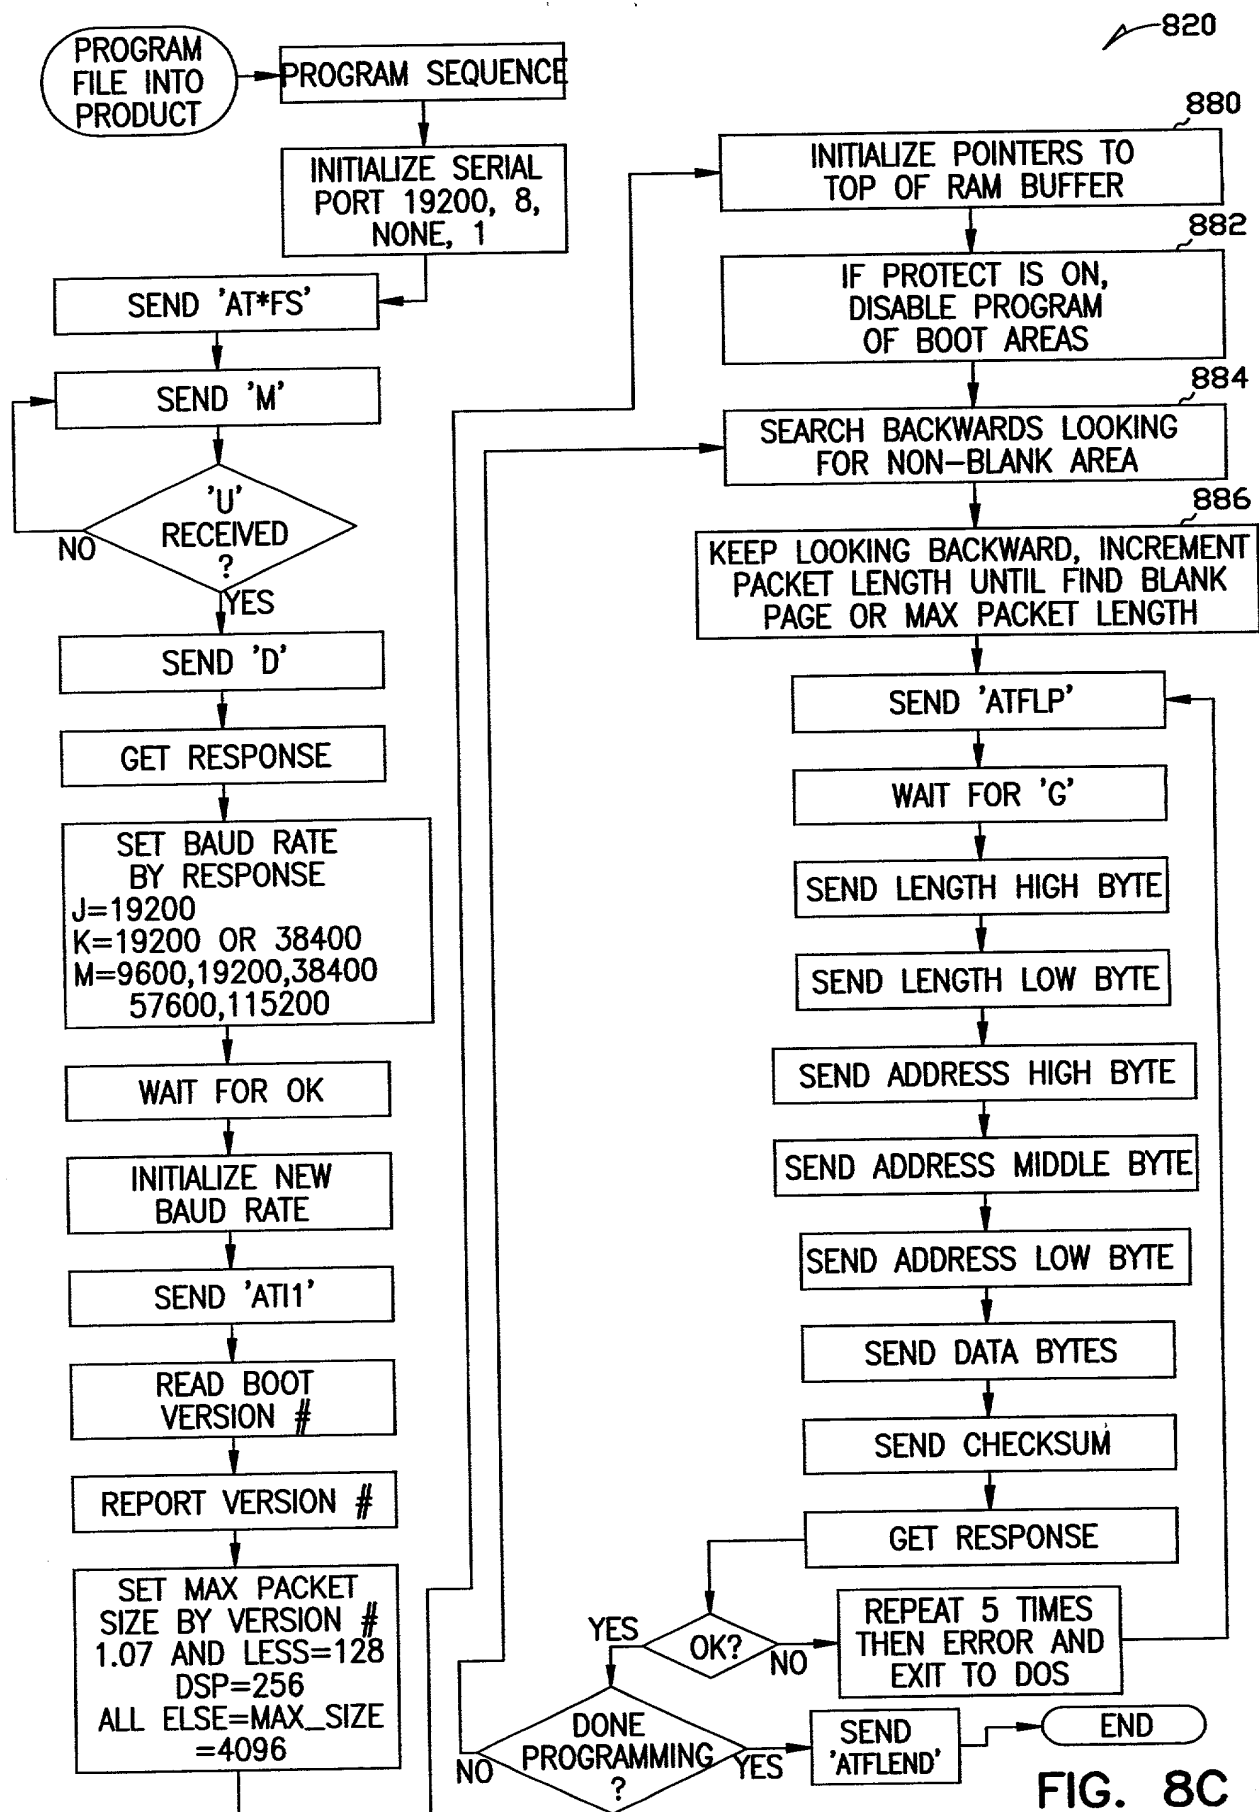


FIG. 8C

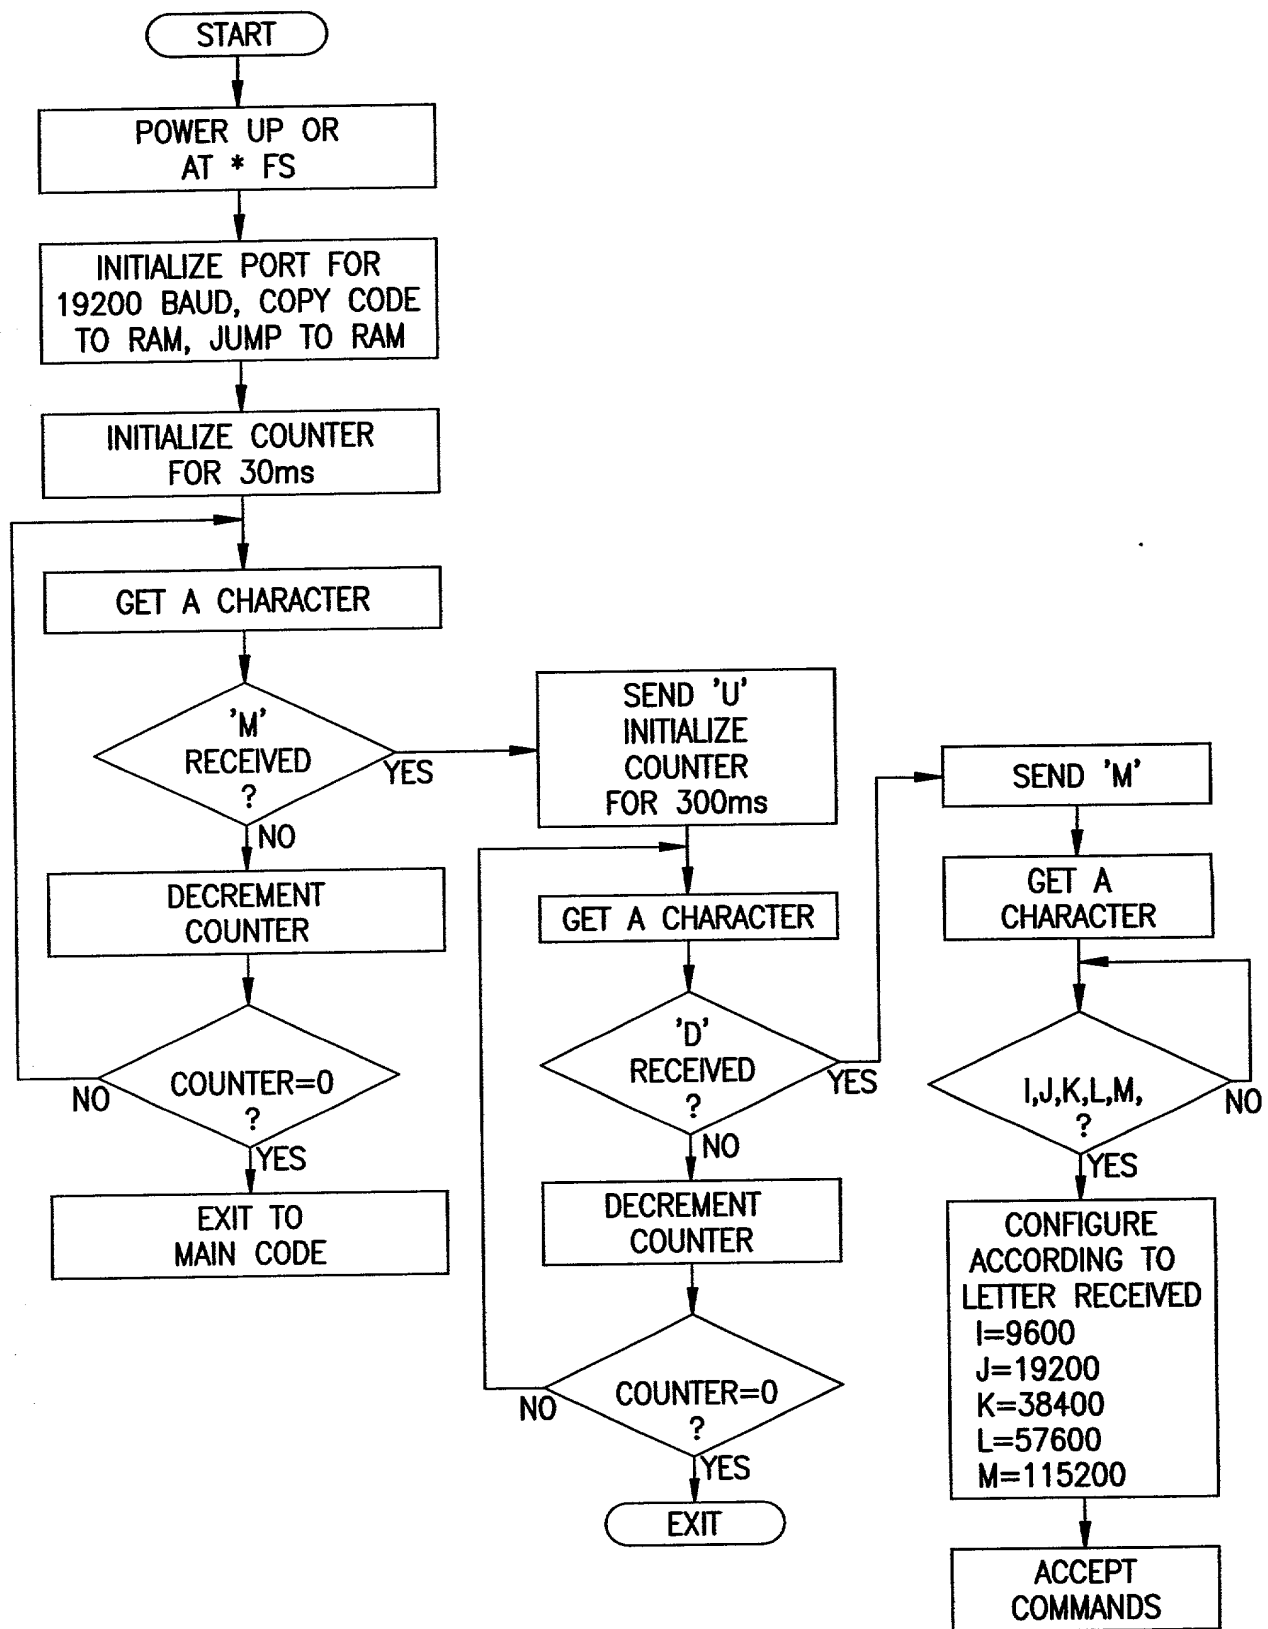


FIG. 9A

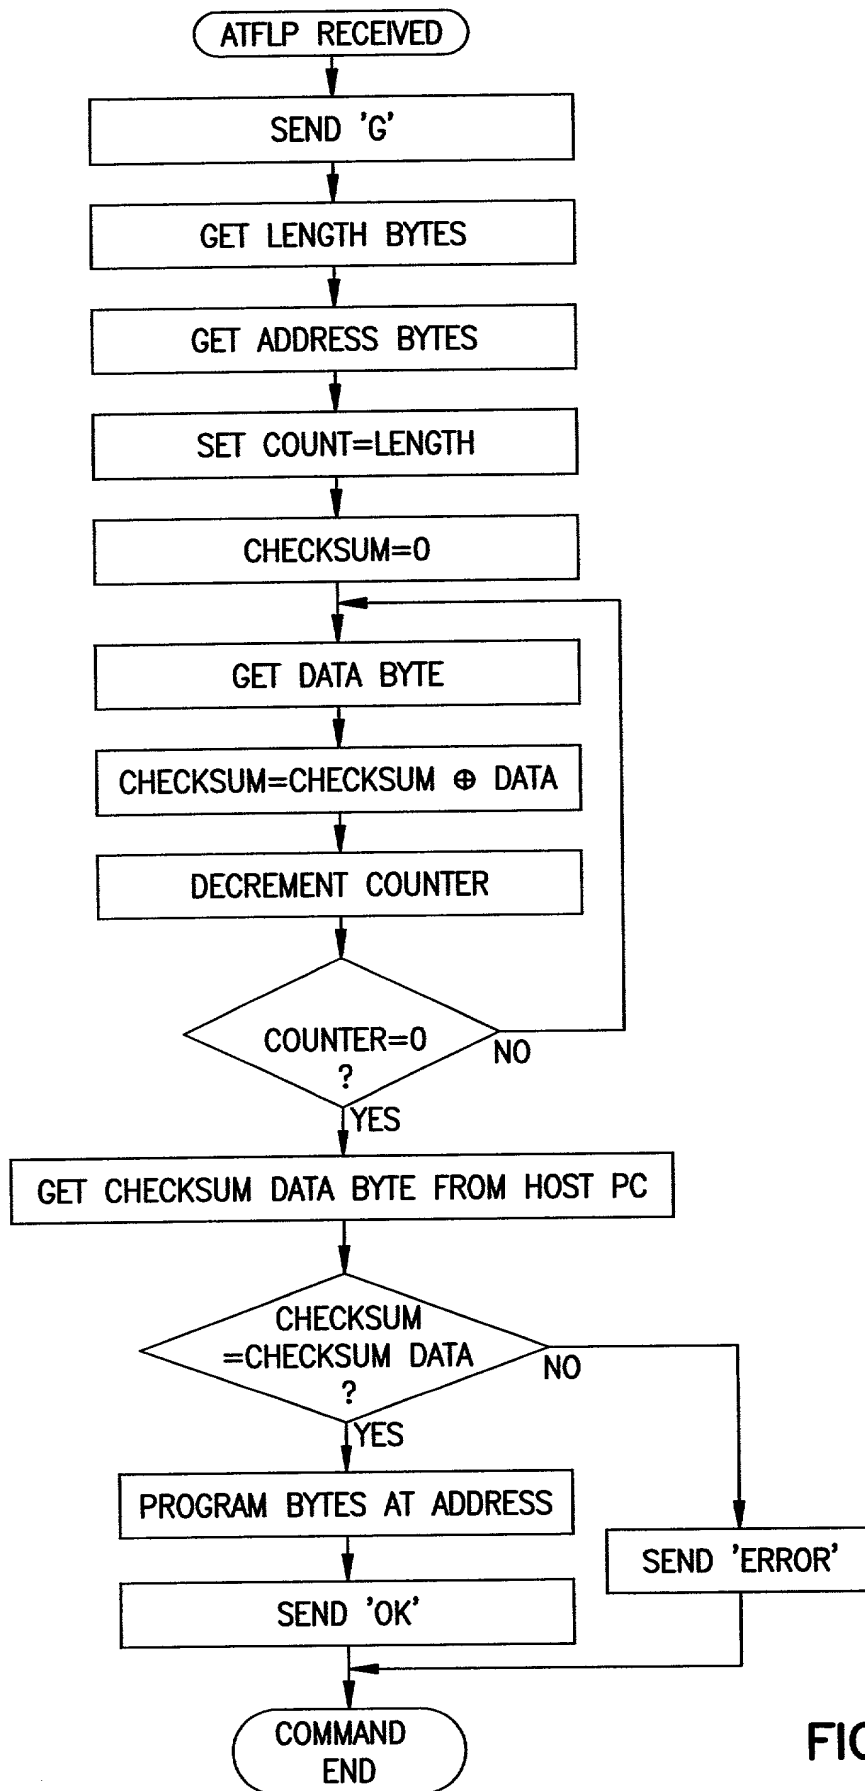


FIG. 9B

ATFLEND RECEIVED

DISABLE
SERIAL PORT

JUMP TO
MAIN CODE

COMMAND END

FIG. 9C

ATix RECEIVED

x=0 SEND PRODUCT ID CODE
x=1 SEND BOOT VERSION NUMBER
x=2 SEND 'MT1432xx'
x=3 SEND '000 000 000 000 000 000 000 000 000'
x≠0,1,2,3 DEFAULT TO 10

COMMAND END

FIG. 9D

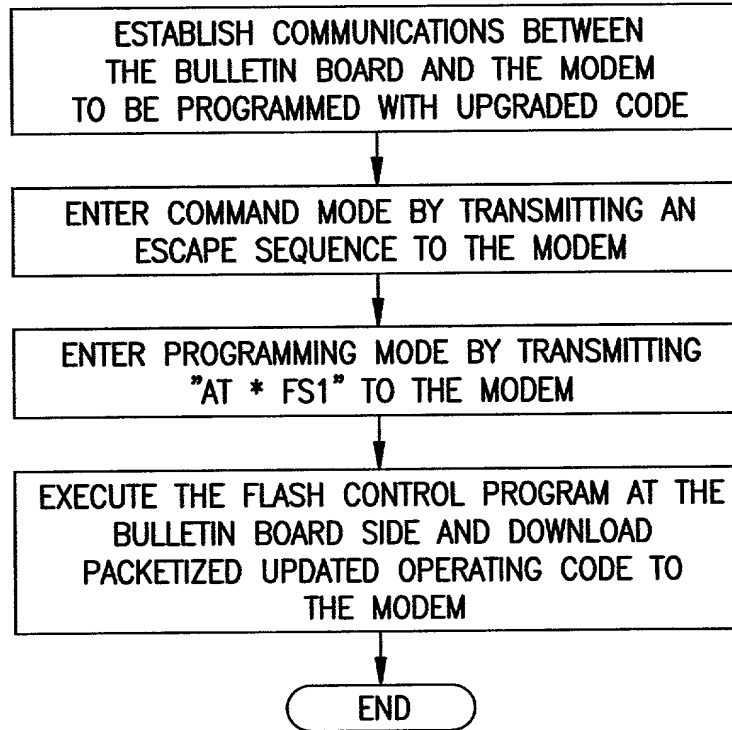
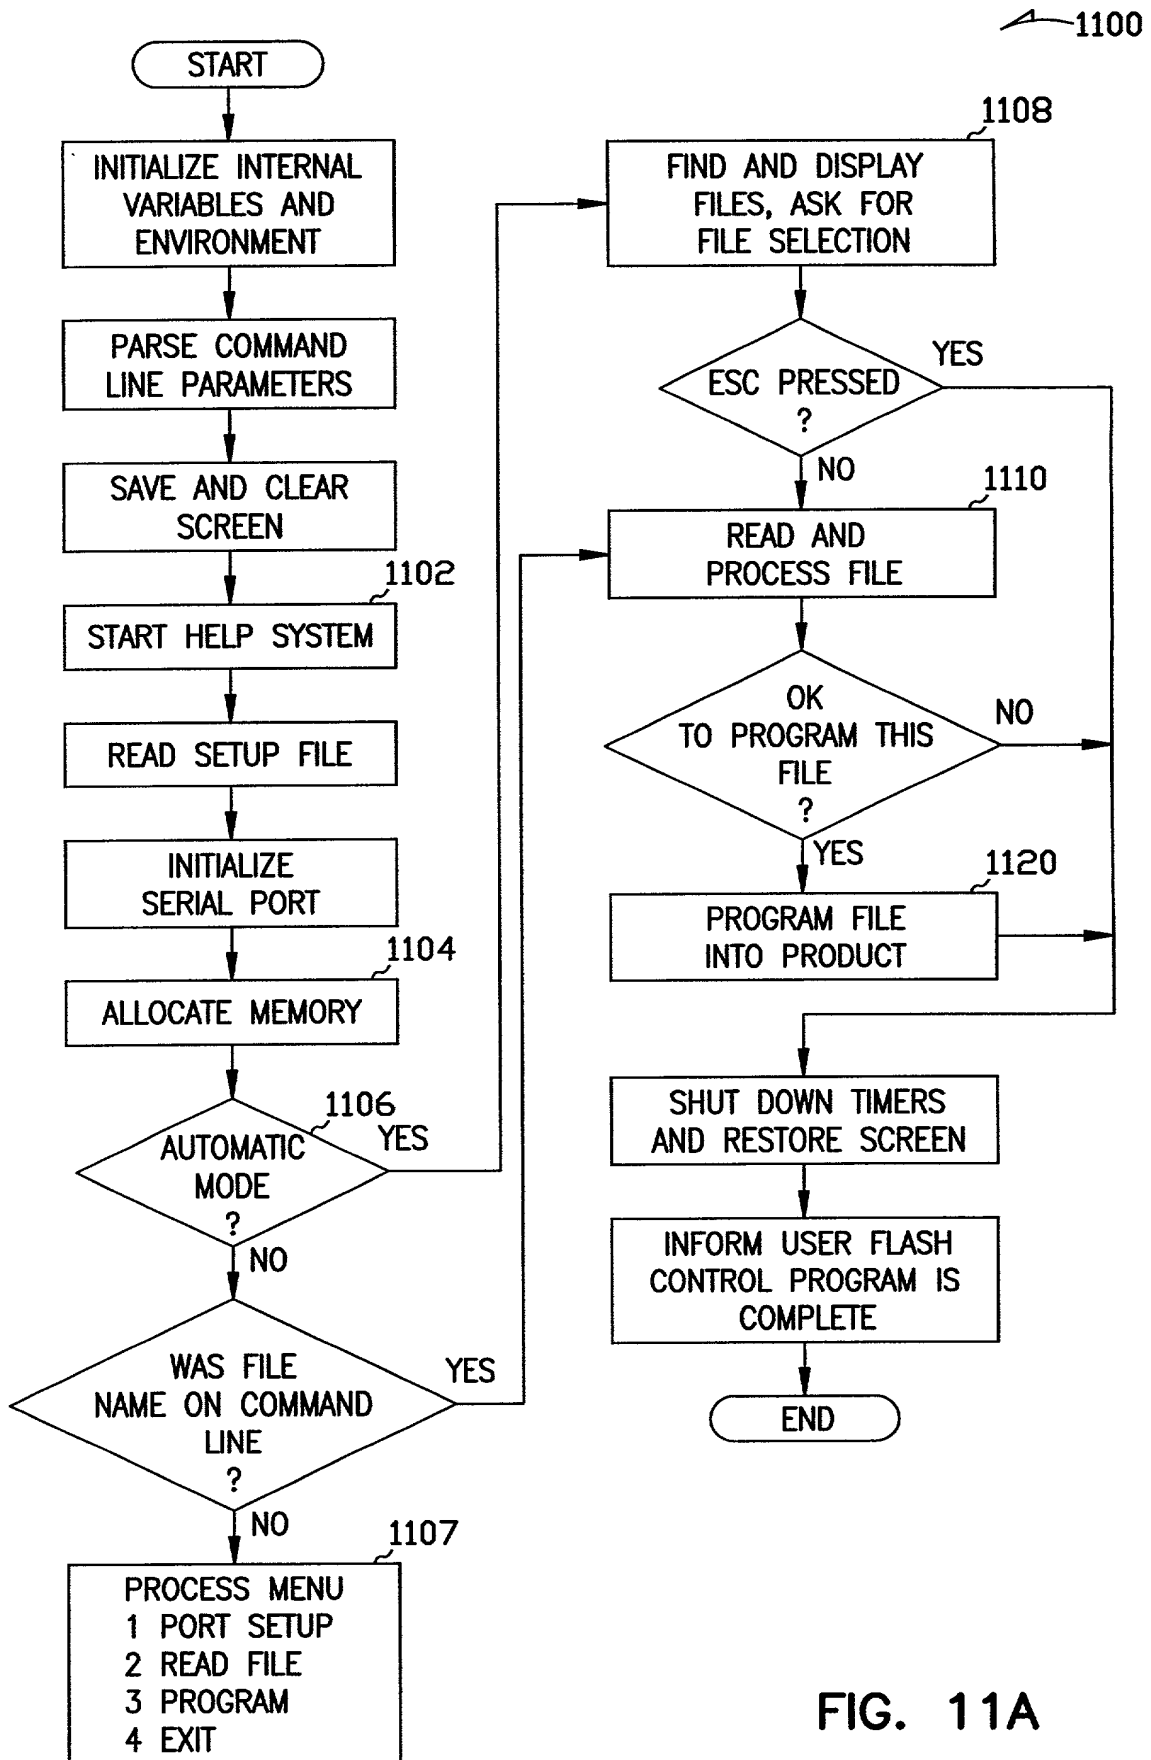


FIG. 10



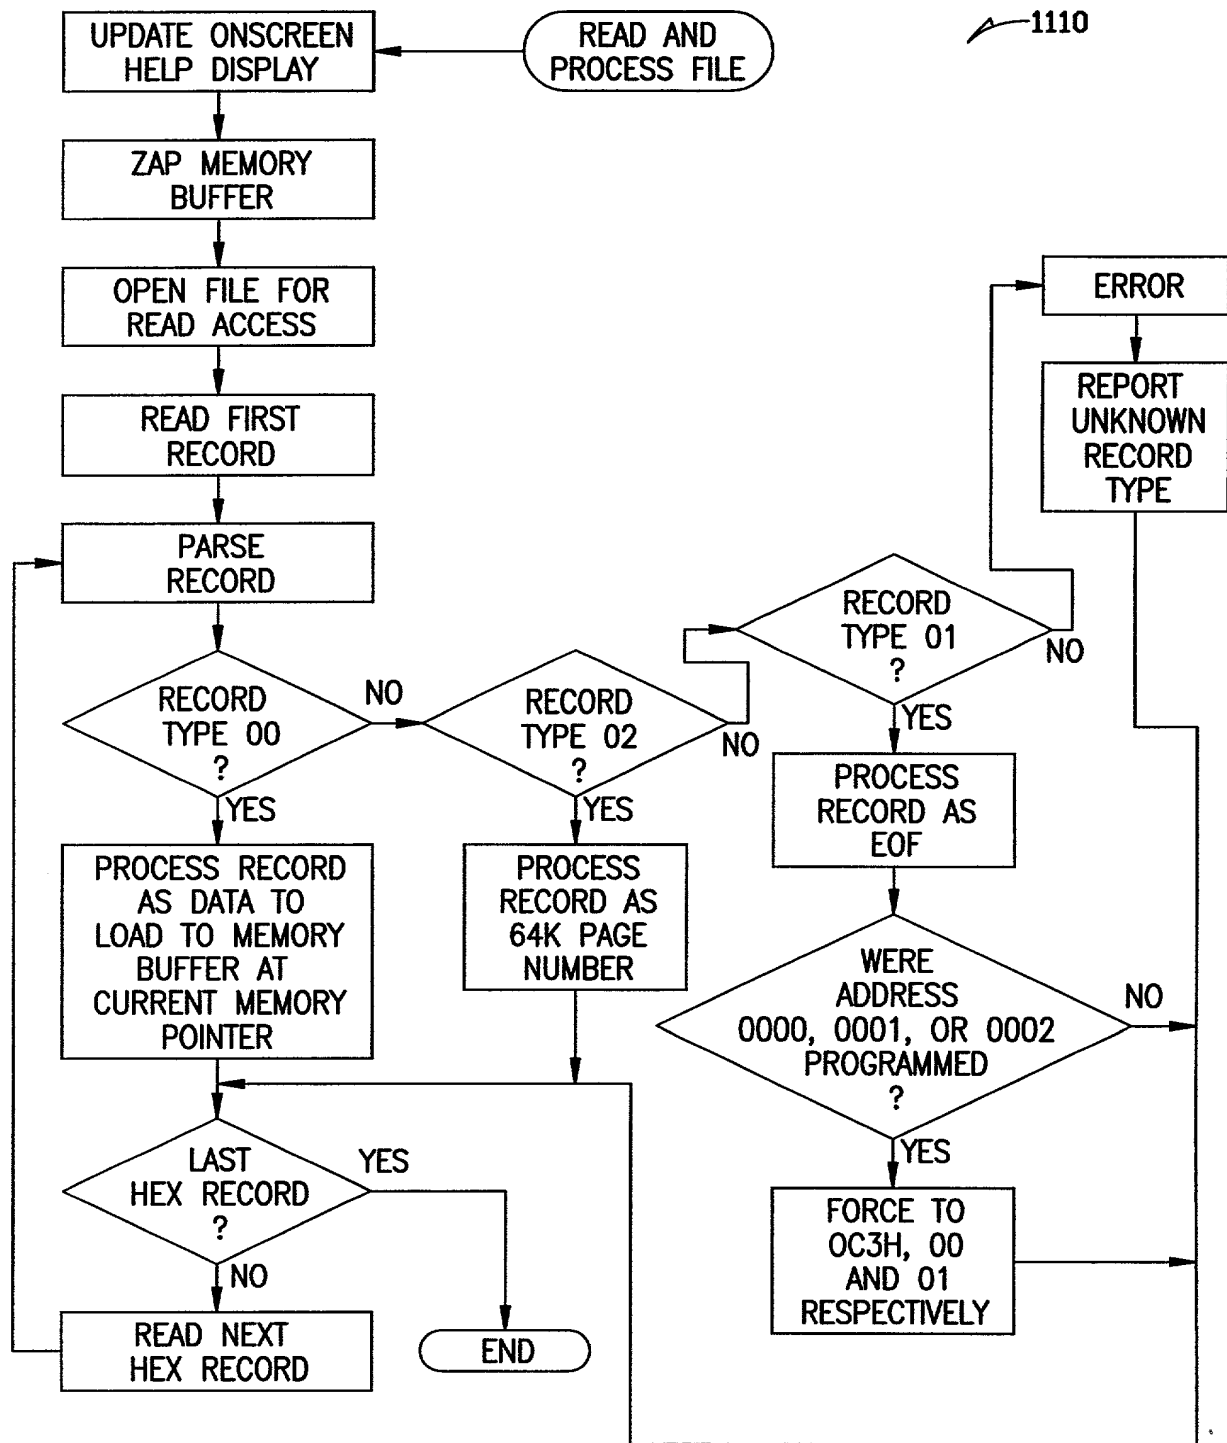


FIG. 11B

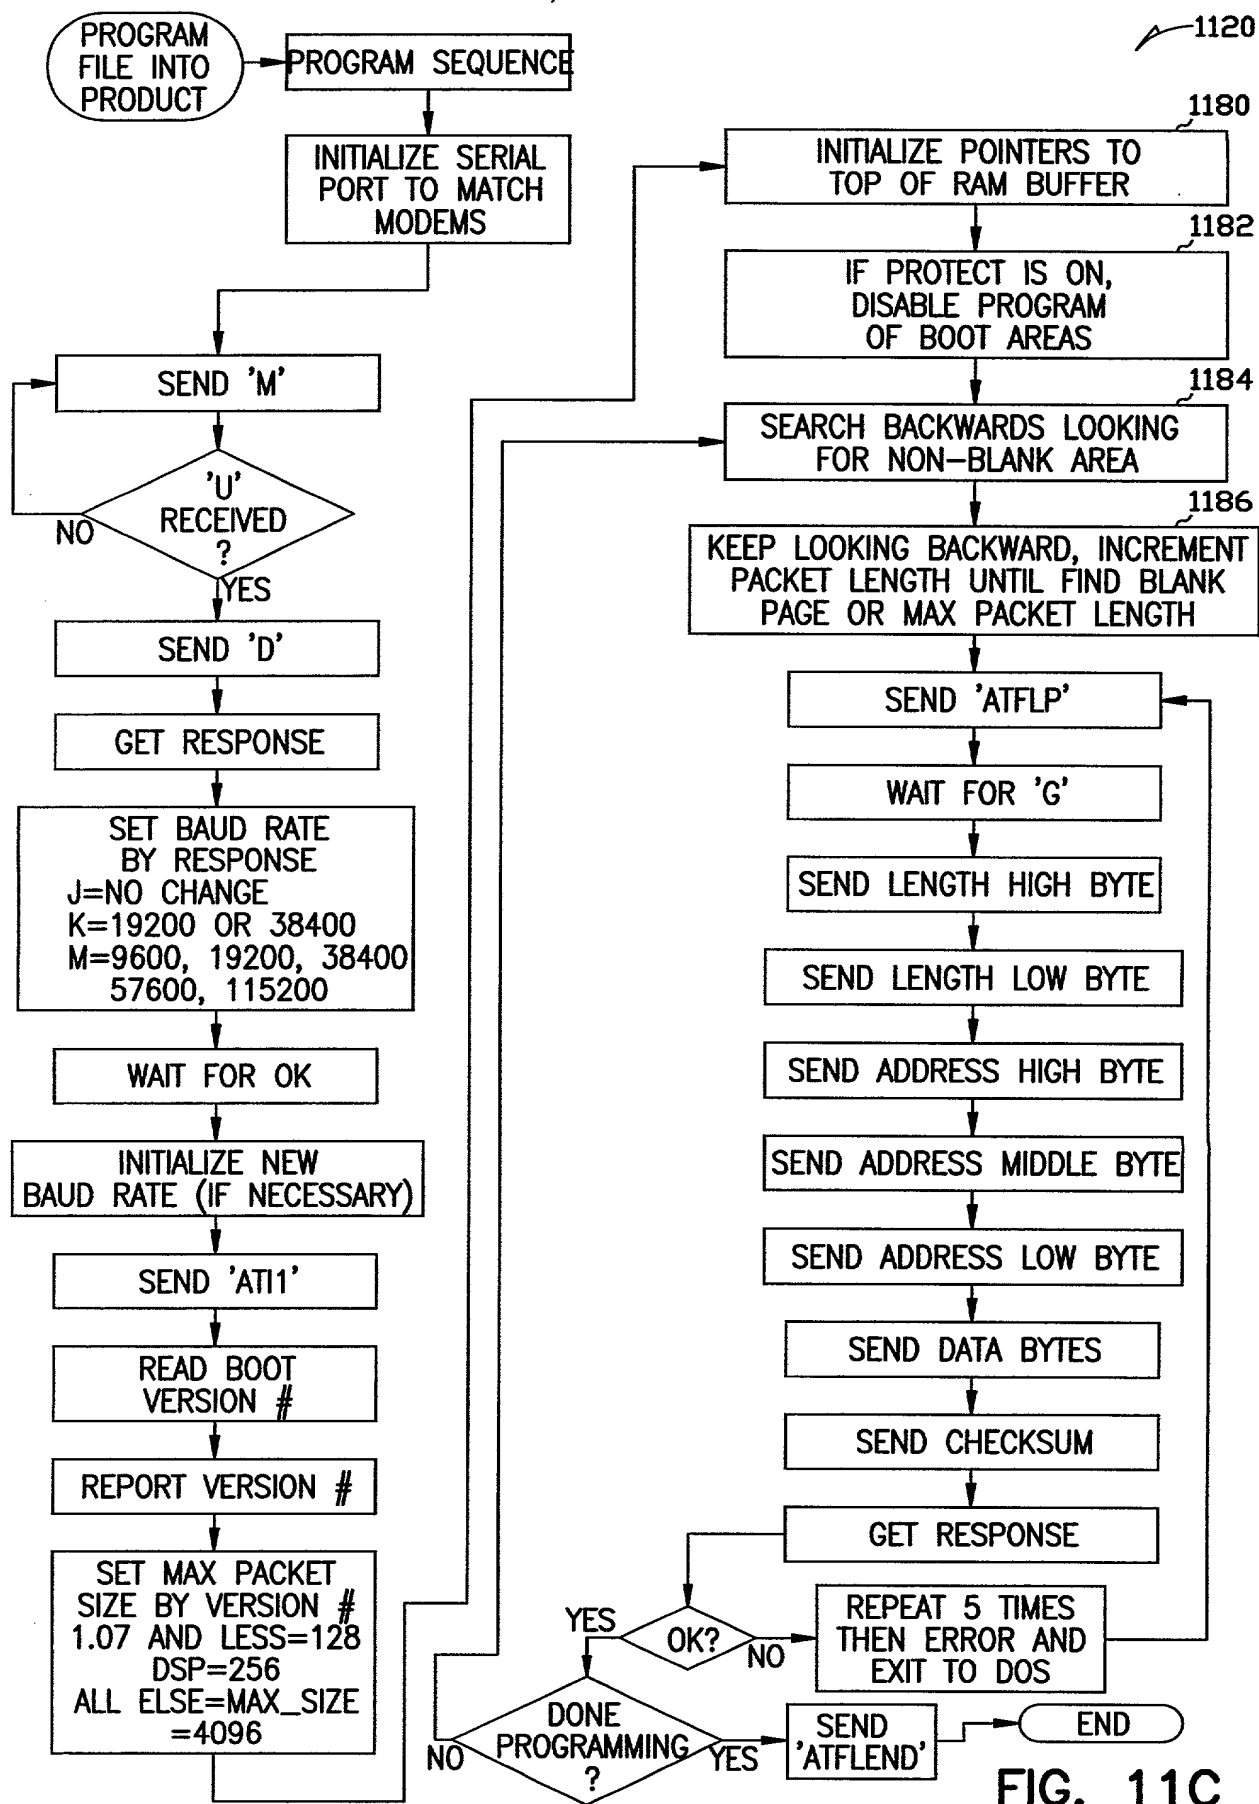


FIG. 11C

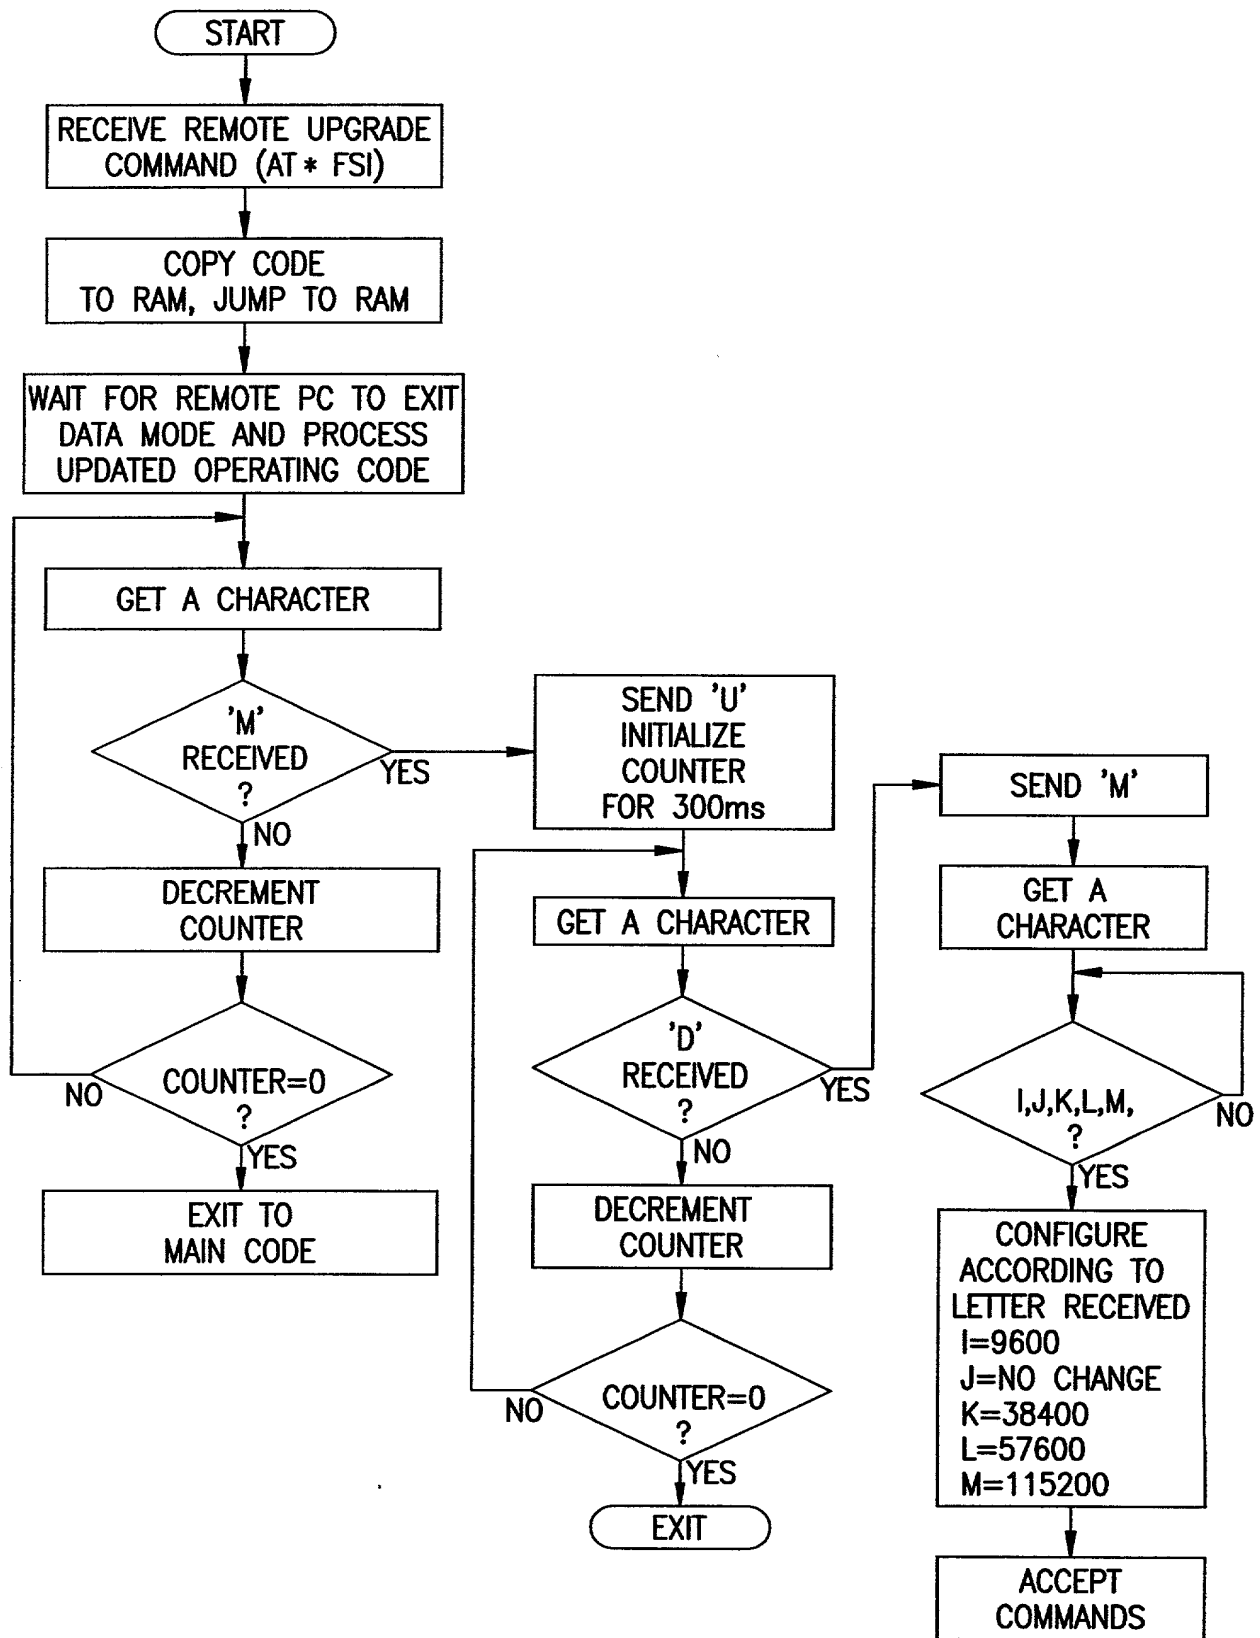


FIG. 12A

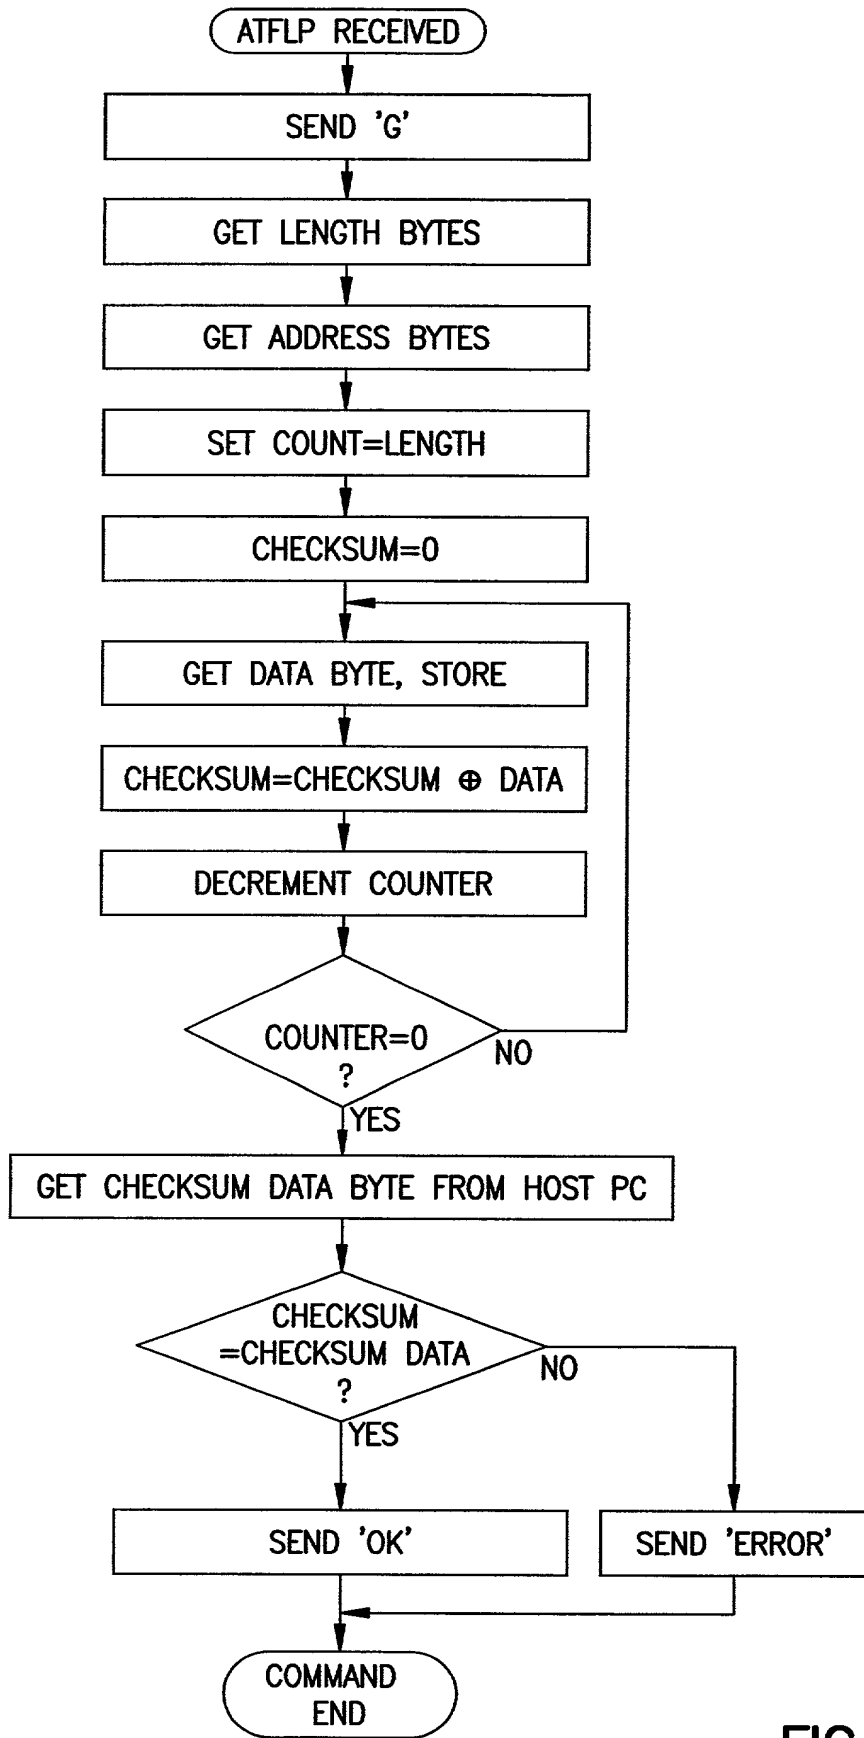


FIG. 12B

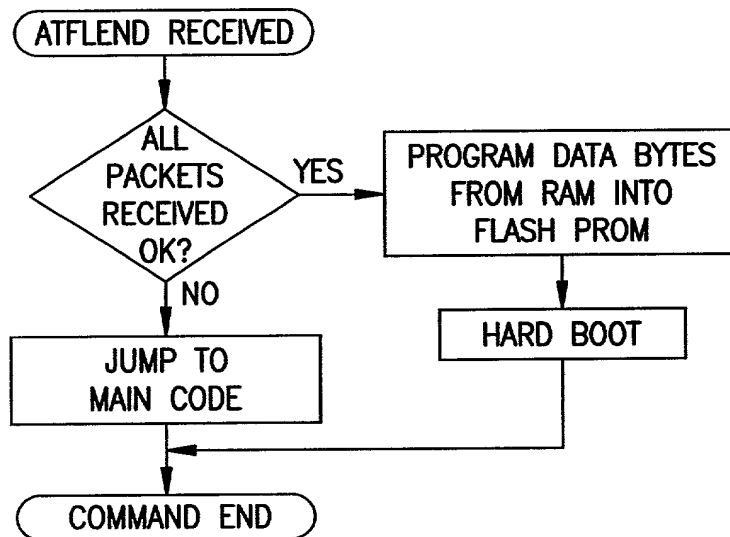


FIG. 12C

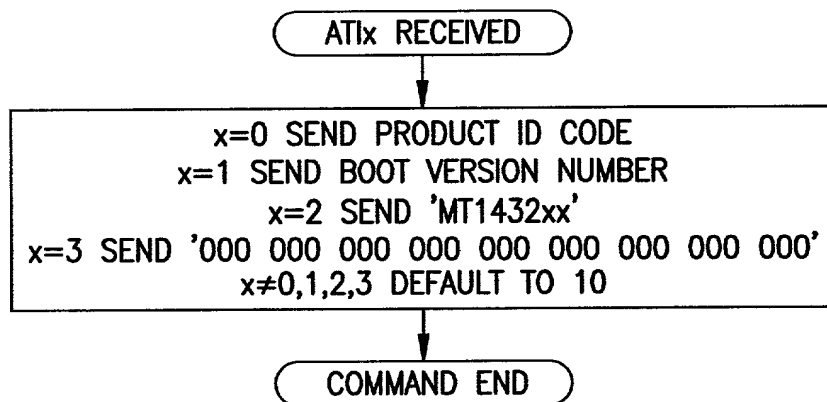


FIG. 12D